

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
5 February 2004 (05.02.2004)

PCT

(10) International Publication Number  
**WO 2004/011182 A2**

(51) International Patent Classification<sup>7</sup>: **B23K 1/00**

(21) International Application Number:  
PCT/JP2003/009648

(22) International Filing Date: 30 July 2003 (30.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
NO. 2002-223536 31 July 2002 (31.07.2002) JP

(71) Applicant (for all designated States except US): **MAT-SUSHITA ELECTRIC INDUSTRIAL CO., LTD.**  
[JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka  
571-8501 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **NONOMURA, Masaru** [JP/JP]; Haitsu Yuki A-205, 2511, Kamisuki-awara, Syowa-cho, Nakakoma-gun, Yamanashi 409-3861

(JP). **ISOBATA, Yoshinori** [JP/JP]; Vira Okuni No.2-303, 481-2, Ushiroya-machi, Kofu-shi, Yamanashi 400-0045 (JP). **ONISHI, Hiroaki** [JP/JP]; 12-14-201, Nakamura-cho, Ibaraki-shi, Osaka 567-0822 (JP). **TANIGUCHI, Masahiro** [JP/JP]; 2-28, Ogura-cho, Hirakata-shi, Osaka 573-1173 (JP).

(74) Agents: **KAWAMIYA, Osamu** et al.; AOYAMA & PARTNERS, IMP Building, 3-7, Shiromi 1-chome, Chuo-ku, Osaka-shi, Osaka 540-0001 (JP).

(81) Designated States (*national*): CN, US.

(84) Designated States (*regional*): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).

**Published:**

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD, APPARATUS AND PROGRAM OF THERMAL ANALYSIS, HEAT CONTROLLER AND HEATING FURNACE USING THE METHOD

(57) Abstract: Heating characteristic value at any measuring point of an object at any measuring location of an heating furnace is determined as a single invariable by using temperature (T<sub>int</sub> and T<sub>s</sub>) measured at the measuring point of the object and heating temperature (T<sub>a</sub>) and heating time (t) at the measuring location of the heating furnace. The heating characteristic value (m-value) may be calculated without using physical characteristics of the object. By using the m-value, temperature profile of the object heated under modified heating condition may be simulated in a short period of time without actually heating and measuring temperature of the object at high accuracy level. By using such simulation, appropriate heating condition for heating an object in accordance with desired heating condition may easily be determined.

ATTACHMENT "B"

## DESCRIPTION

Method, Apparatus and Program of Thermal Analysis, Heat  
5 Controller and Heating Furnace Using the Method

## BACKGROUND OF THE INVENTION

Present invention relates to a method of thermal analysis  
for determining appropriate heating condition for heating  
10 an object in accordance with a required temperature profile.  
The present invention also relates to an apparatus of  
thermal analysis, a heat controller and a heating furnace  
using such a method. More specifically, the present  
invention relates to a method of thermal analysis, and a  
15 reflow furnace using such a method for determining proper  
heating condition for heating a circuit substrate.  
Electronic components are mounted on the circuit substrate  
via cream solder which is melted when heated. After the  
circuit substrate is cooled, the melted cream solder  
20 solidifies, thereby the electronic components are welded  
onto the circuit substrate. The present invention also  
relates to a program and a computer readable recording  
medium recording such a program, which may be used for  
making the computer to process the method of thermal  
25 analysis.

When heating an object in a heating furnace, it is necessary to control heating temperature and heating time in a predetermined manner so as to keep the object at proper temperature for a certain period of time and not to overheat beyond the upper limit temperature of the object. Prudent thermal analysis and temperature control is critical for not only keeping the object at such proper temperature for a certain period of time in a heating furnace, but also for heating the object in accordance with a required temperature profile during preheating, main heating and cooling stages.

The following description is made by referring to a reflow furnace as an example, which is used for soldering electronic components onto a circuit substrate such as an electronic circuit board (herein after referred to as a "circuit board"). In a reflow process, at first, cream solder is printed on a circuit board, and electronic components are mounted on the circuit board at corresponding predetermined positions. The circuit board is then introduced into a reflow furnace for heating and melting the solder, thereby soldering and securing the components onto the circuit board. In order to avoid any heat destruction of the object (i.e., electronic components

as well as the circuit board) due to steep temperature increase in the reflow furnace, the object is first heated at relatively low temperature at a preheat stage. Such heating at the preheat stage is also preferable to activate  
5 fluxes contained in the cream solder, such as anti-oxidization flux, for improving soldering quality. The object is then heated at a reflow stage, where the object is kept at a temperature over a melting point of the solder for a predetermined period of time so that the solder may  
10 be completely melted. After the reflow stage, the object is cooled for solidifying the solder to secure the electronic components onto the circuit board.

In view of a recent environmental conservation demand,  
15 there exists a trend for some time that conventional solder materials made from tin-lead compound are being replaced by lead-free materials, such as tin-zinc-bismuth compound, which do not contain any poisonous materials. Melting point of such lead-free solders is generally somewhere  
20 around 220°C, which is higher than melting point of about 190°C for lead-based solders. Therefore, the lead-free materials should be heated at a higher temperature than the conventional solder during the reflow heating operation for complete melting. On the other hand, in order to prevent  
25 any heat destruction of the electronic components and the

circuit board during such heating, the object, or the circuit board having electronic components thereon, should not be heated over the upper limit temperature, which is a temperature all the components and the circuit board may endure and sustain their intended functions. For example, in case one of the electronic components to be mounted on the circuit board is an aluminum electrolytic condenser, such upper limit temperature is about 240°C. This means that when heating temperature for heating the object is too low (e.g., below 220°C), the electronic components may not be securely soldered onto the circuit board, while on the other hand when heating temperature is too high (e.g., over 240°C), the electronic component may be damaged. Consequently, as described above, severe temperature control for heat the solder at over its melting point, and yet at lower than the upper limit temperature of the respective components is needed for achieving reliable soldering operation in the reflow furnace. Toward this end, heating condition including temperature of a heating source, such as heat blower or a heat panel, and transfer speed for moving the object through the heating furnace should be properly determined in accordance with a temperature profile corresponding to required heating conditions for heating the respective object.

There are two types of heating methods applicable to heating furnaces. One of them is convection type heating in which heated air from a heat source such as electricity or burning gas or oil is blown toward the object, and another is a radiation type heating in which a heat source such as infrared radiation heat source radiates heat toward the object. There are a variety of heating equipments, such as reflow furnace, heat treatment furnace, sintering furnace, baking oven such as used for making ceramics, melting furnace, or incinerating equipment. Depending on a purpose of heating and/or a kind of heating equipment, appropriate heating type may be selected. In case of severe temperature control is required, such as a case for reflow furnace for soldering electronic components onto a circuit board, convection type heating is typically selected because of its relatively easy temperature controlling capability.

In a conventional way of determining reflow heating condition, at least one thermocouple is fixed to the circuit board, and temperature change at such a fixed point is measured during heating. Such measurement is repeated by changing heating condition of the reflow furnace one after another until appropriate heating condition is identified. Each time of changing heating condition,

relatively long period of time is required for waiting for temperature of the furnace to become in a stable condition for the next trial. Typically, such repetition is required for about ten times until the appropriate heating condition is determined. In addition to such lengthy time for waiting, inspiration and experience of a skilled operator is inevitable for setting subsequent heating condition based on preceding measurement results. Moreover, even if appropriate heating condition is determined through such trial and error efforts, it is still not certain as to whether such heating condition is optimum or not, namely, whether such heating condition may easily meet the required conditions, or barely meet the conditions.

In the prior art, some alternative methods of determining reflow heating condition have been proposed for avoiding such a laborious method with lengthy operations conducted by a skilled operator. Japanese patent application laid open to public No. 45961/2002-A discloses a method for determining an optimum heating condition, including steps of:

heating a test sample with known physical characteristics in a heating furnace, and measuring temperature change thereof;

processing the temperature change with differential

equation by using a heating feature of the heating furnace as a parameter;

repeating such processing by changing a value representing the heating feature of the heating furnace until a difference between the measured value and the processed value becomes minimum.

Japanese patent application laid open to public No. 201947/1999-A (Patent No. 3274095) discloses a method of controlling a heat source including steps of:

setting heating condition for each of a plurality of heating sources to be used for heating an object;

heating the object and detecting temperatures of a plurality of detecting points of the object;

relations between difference of heating condition for each heat source and difference of detected temperature of each detecting point of the object is calculated, and

based on the result of calculation, determining heating condition for each heating source that may make the temperature of the object to be the same as the targeted temperature.

Both of these method, however, require physical characteristics of the object (or a test piece) in order for determining an optimum heating feature or controlling



the heating source. Accordingly, it is necessary to obtain individual physical characteristic data of the object, and input these data beforehand. Especially in these days, one circuit board typically has about 100 electronic components to be mounted thereon. Design changes and component combination changes are so often. In view of these circumstances, it is rather difficult at operation sight to implement such complicated and time consuming methods which require obtaining physical characteristics for individual measuring points, or electronic components, of the object. In some cases, such as the case when object is formed by mixed components or combination of many components, obtaining physical characteristics of those components is difficult.

U.S. Patent No. 6,283,378 discloses a method of adjusting boundary condition temperature of a heating furnace having a plurality of heating sections, including steps of:

measuring both of boundary condition temperature and blowing heat temperature for each of the heating sections, and

adjusting the boundary condition temperature by an amount equivalent to a minimum difference between the boundary condition temperature and the blowing heat temperature among the differences for all of the heating sections.

According to this method, however, adjustment is made only by parallel translation of a temperature profile, which is to move a temperature profile based on a single factor without considering respective differences at each of the boundary of the heating sections. Therefore, it is difficult to perform an accurate simulation, especially when a peak temperature of the object does not exist at said boundary, or when the temperature profile is formed by complicated curves. Moreover, since an adjustment of the heating furnace as a whole is made by a single temperature control, there exists a problem that specific heating condition at each of the plurality of measuring points are neglected.

Accordingly, in view of the above mentioned problems of conventional methods, the purpose of the present invention is to provide a method and an apparatus of thermal analysis as well as a heating furnace which may be used for determining a proper heating condition of a heating furnace in an effective manner, without requiring physical characteristics of the object to be heated, or without conducting repetitive heating and measuring processes of a sample object in a trial and error manner.

It is also a purpose of the present invention to provide a

heat controller capable of implementing the above mentioned method, computer readable recording medium which can be used for the heat controller, and a program to be recorded in such a recording medium.

5

#### SUMMARY OF THE INVENTION

The present invention resolves the above described problems by providing a method and apparatus of thermal analysis which may determine a single invariable  
10 representing heating characteristic at each measuring point of the object to be heated at each measuring location of a heating furnace based on heating temperature and heating time of the measuring location and measured temperature of the measuring point. More specifically, the present  
15 invention includes the following.

One aspect of the present invention relates to a method of thermal analysis, wherein heating characteristic at any measuring point of an object at any measuring location of a  
20 heating furnace is determined as a single invariable by using temperature measured at the measuring point of the object and heating temperature and heating time at the measuring location of the heating furnace. Such heating characteristic represents physical characteristics of both  
25 of the heating furnace and the object to be heated.

By using such a invariable, it becomes possible to simulate temperature profile of an object when the object is heated under a given heating condition in the heating furnace. Or in the opposite manner, it becomes possible to determine an appropriate heating condition for heating an object in the heating furnace in accordance with given required conditions.

The invariable described above may be an m-value defined by:

$$m = \frac{1}{t} \ln \left[ \frac{T_a - T_{int}}{T_a - T_s} \right]$$

wherein  $\ln$  is natural logarithm,  $T_a$  is heating temperature of the measuring location of the heating furnace,  $T_{int}$  is initial temperature of the measuring point of the object at the measuring location,  $T_s$  is achieved temperature when the object is heated at the measuring location, and  $t$  is heating time at the measuring location.

By using the m-value, heating temperature  $T_a$  and heating time  $t$  of the heating furnace for satisfying a temperature  $T_s$  of the object may be determined based on a basic equation for heating defined by:

$$T_s = T_a - (T_a - T_{int}) e^{-mt}$$

wherein  $e$  in the equation represents the base of natural

logarithms. Or in a opposite manner, temperature  $T_s$  of the object may be simulated when heating temperature  $T_a$  and heating time  $t$  of the heating furnace are given.

5 Another aspect of the present invention relates to a program for making a computer to process steps of determining appropriate heating condition of a heating furnace having a plurality of heating sections forming a first and a second heating stages for heating an object in  
10 accordance with a required temperature profile corresponding to predetermined required conditions for each of the first and the second stages, said steps comprising:

obtaining heating characteristic value for at least one measuring location of each of said plurality of heating  
15 sections calculated from heating temperature and heating time at said measuring location as well as measured temperature of at least one measuring point of the object when the object is heated under certain heating condition at the measuring location,

20 electing one measuring point which has achieved the highest temperature during heating at the first heating stage among all the measuring points, and confirming whether temperature of the elected measuring point is not over the upper limit of the required conditions  
25 (confirmation step A);

when temperature of the elected measuring point is over the required conditions of the first heating stage at the confirmation step A, modifying the heating condition by lowering the heating temperature based on a predetermined rule and simulating temperature at each measuring point under the modified heating condition by using the corresponding heating characteristic value, and repeating the above procedures from the confirmation step A;

when temperature of the elected measuring point is not over the required conditions of the first heating stage at the confirmation step A, confirming whether or not the elected measuring point meets heating time of the required conditions of the first heating stage (confirmation step B);

when the heating time of the elected measuring point falls short of the required conditions of the first heating stage at the confirmation step B, modifying the heating condition by raising the heating temperature based on a predetermined rule or by lengthening the heating time based on a predetermined rule and simulating temperature for each measuring point under the modified heating condition by using the corresponding heating characteristic value, and repeating the above procedures from confirmation step A;

when the heating time of the elected measuring point goes over the required condition conditions of the first

heating stage at the confirmation step B, modifying the heating condition of the first heating stage by lowering the heating temperature based on a predetermined rule or by shortening the heating time based on a predetermined rule and simulating temperature for each measuring point under the modified heating condition by using the corresponding heating characteristic value, and repeating the above procedures from the confirmation step A;

when the heating time of the elected measuring point meet the required conditions of the first heating stage at the confirmation step B, confirming whether or not all the other measuring points meet the required conditions of the first heating stage (confirmation step C);

when any one of the measuring points does not meet the required conditions of the first heating stage at the confirmation step C, modifying the heating condition by lengthening the heating time of the first heating stage based on a predetermined rule or by raising the heating temperature of the first heating stage based on a predetermined rule and simulating temperature for each measuring point under the modified heating condition by using the corresponding heating characteristic value, and repeating the above procedures from the confirmation step A;

when all the measuring points meet the required

conditions for the first heating stage at the confirmation step C, electing one measuring point, as a critical measuring point, which has achieved the lowest temperature at the second heating stage during heating among all the measuring points;

detecting heating condition of each of the heating sections in the second heating stage which may make said critical measuring point to satisfy both of the required upper end temperature that the object needs to achieve and the maximum temperature that the object should no go over, by simulating temperature of the critical measuring point by using the corresponding heating characteristic value for each of the measuring locations in the second heating stage based on a predetermined algorithm,

confirming whether or not any of the detected heating conditions at the detecting step meet targeted heating temperature and heating time that the object needs to clear for fulfilling the purpose of heating (confirmation step D);

when none of the detected heating conditions meet the targeted heating temperature and heating time at the confirmation step D, modifying the heating condition by lengthening the heating time based on a predetermined rule and simulating temperature at each measuring point under the modified heating condition by using the corresponding



heating characteristic value, and repeating the above procedures either from the step of electing the critical measuring point or from the confirmation step A;

5 when any one of the detected heating conditions meet the targeted heating temperature and heating time at the confirmation step D, confirming whether such detected heating condition(s) meet other required conditions of allowable limited temperature and time that the object may endure during heating (confirmation step E);

10 when none of the detected heating condition(s) meet the allowable limited temperature and time at the confirmation step E, modifying the heating condition by shortening the heating time based on a predetermined rule and simulating temperature at each measuring point under  
15 the modified heating condition by using the corresponding heating characteristic value, and repeating the above procedures either from the step of electing the critical measuring point or from the confirmation step A;

20 when any one of the detected heating condition(s) meet the allowable limited temperature and time at the confirmation step E, temporarily electing one detected heating condition that has cleared the allowable limited temperature and time requirement by the shortest time among  
25 all the detected heating condition(s) as the appropriate heating condition for satisfying the required temperature

profile;

confirming whether all the other measuring points meet the required conditions of the second heating stage by simulating temperatures under the temporarily elected heating condition by using the corresponding heating characteristic values of the other measuring points (confirmation step F);

when any of the measuring points do not meet the required conditions of the second heating stage at the confirmation step F, modifying the temporarily elected heating condition by shortening heating time based on a predetermined rule and simulating temperature of each measuring point under the modified heating condition by using the corresponding heating characteristic value, and repeating the above procedures either from the step of electing the critical measuring point or from the confirmation step A; and

when all the measuring points meet the required conditions for the second heating stage at the confirmation step F, determining that the temporarily elected heating condition is appropriate for satisfying the required temperature profile.

The first heating stage and the second heating stage may be arranged either in a combined process as shown in the

above program, or in separated processes.

The predetermined algorithm for detecting heating conditions for making the critical measuring point to satisfy both of the required upper end temperature and the maximum temperature in the above program may be configured by the steps of:

creating combinations of heating condition of at least two heating sections by raising respective heating temperatures independently by every predetermined amount from the initial temperature of the object at the beginning of the heating section up to a predetermined upper limit temperature defined by the heating furnace;

simulating temperature of the critical measuring point under each of the created combinations of the heating condition, and developing temperature profiles corresponding to each of the combinations of the heating condition; and

detecting any of the combinations of the heating condition which may make the corresponding simulated temperature to locate inside a zone defined by said at least two heating sections, which zone is surrounded by an upper boundary and a lower boundary, wherein the upper boundary comprising an temperature increase line between a point H of an initial temperature of the preceding heating

section and a point E of the maximum temperature at the end  
of the same heating section as well as a line of the  
maximum temperature between said point E and a point G at  
the end of said at least two heating sections, while the  
5 lower boundary comprising a line between said point H and a  
point F of the required upper end temperature at the end of  
said at least two heating sections.

Yet another aspect of the present invention relates to an  
10 apparatus for performing thermal analysis to be used for  
heating an object in a heating furnace, comprising a input  
means, a memory and a processor,

wherein said input means obtains information of  
heating temperature and heating time of the heating furnace  
15 and temperature of the object,

said memory stores a logic for calculating heating  
characteristic value, and a basic equation for heating or a  
logic for calculating temperature of the object to be  
heated by using said heating characteristic value as well  
20 as the heating temperature and heating time, and

said processor calculates either said heating  
characteristic value or temperature of the object  
corresponding to the heating temperature and the heating  
time, by using said logics and said basic equation for  
25 heating stored in the memory. The apparatus may further

includes a reading means for reading recording medium, in which case, the processor may determine appropriate heating condition including heating temperature and heating time that satisfies the required conditions of the object to be heated, by using the required conditions for heating the object obtained by the input means, algorithm that the reading means obtained by reading the recording medium, and the heating characteristic value calculated by the processor.

10

The above apparatus may be used as a heat controller by adding an input means, which heat controller may determine appropriate heating condition including heating temperature and heating time for each of heating sections structured in a heating furnace. The heat controller may also control the heating furnace based on such determined appropriate heating condition so as to heat an object in accordance with a required temperature profile corresponding to required conditions for heating the object.

20

Yet another aspect of the present invention relates to a heating furnace for heating an object introduced into the furnace in accordance with a required temperature profile corresponding to required conditions for heating the object, said heating furnace comprising at least one heating

25

section, a heat source provided to each of the heating sections for heating the object, and a heat controller capable of controlling heating condition for each of the heating sections. The heating furnace is provided with the heat controller described above.

The heating furnace described above may be either one of reflow furnace, heat treatment furnace, sintering furnace, baking oven, melting furnace, and incinerating equipment.

10

The present invention will be described in more detail by referring to the accompanying drawings, in which:

Fig. 1 illustrates an embodiment of the reflow heating furnace according to the present invention, and typical temperature profile of an object to be heated in the heating furnace,

15

Fig. 2 shows energy transferring relations between the heating furnace and the object to be heated,

20

Fig. 3 shows a sample object to be heated, and devices for measuring temperature at measuring points of the object,

Fig. 4 illustrates measuring locations of one of the heating sections of the heating furnace where m-values are to be determined,

25

Fig. 5 shows the result of experiment 1 for simulating temperature according to one embodiment of the present

invention,

Fig. 6 shows the result of experiment 2 for simulating temperature according to one embodiment of the present invention,

5 Fig. 7 illustrates simulated temperature profile developed according to one embodiment of the present invention,

Fig. 8 is a flow chart of a method of thermal analysis according to another embodiment of the present invention,

10 Fig. 9 shows the result of experiment 3 for simulating temperature according to one embodiment of the present invention,

Fig. 10 shows the result of experiment for identifying relations between blowing speed of heated air and the heating characteristic value,

15 Fig. 11 is a flow chart showing steps of a program according to another embodiment of the present invention,

Fig. 12 schematically shows a logic of modifying the heating condition used for the first heating stage of the flowchart shown in Fig. 11,

20 Fig. 13 shows an algorithm to detect heating condition at the second heating stage of the flowchart shown in Fig. 11,

Fig. 14 schematically shows another algorithm to detect heating condition at the second heating stage of the flowchart shown in Fig. 11,

25 Fig. 15 shows some examples obtained by a thermal analysis

according to the present invention,

Fig. 16 shows alternative flowchart of Fig. 11 to be applied to the second heating stage, and

Fig. 17 illustrates a block diagram of a heating furnace and an apparatus for thermal analysis according to yet another embodiment of the present invention.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The first embodiment of a method and an apparatus of thermal analysis according to the present invention will be described hereinafter. In the following description, a reflow furnace used for soldering is discussed as an example, but it should be noted that the present invention is not limited thereto. Fig. 1 shows an example of a reflow furnace (upper half of the drawing), and a temperature profile of the object (lower half of the drawing) when the object is heated in the reflow furnace. A heating object, or a circuit board 1 having a plurality of electronic components mounted thereon in this case, is introduced into the reflow furnace 10 from right side of the drawing by means of a transfer device 8. The circuit board 1 is then moved through the reflow furnace 10 in a direction shown by arrows 2 from right to left, and eventually transferred out of the reflow furnace 10 to left side after heating. During the course of this movement in



the heating furnace 10, cream solder printed on the circuit board 1 is melted, thereby electronic components mounted on the circuit board 1 are soldered (i.e., welded) onto the circuit board 1. Inside of the reflow furnace 10 shown in Fig. 1, seven heating sections I - VII are structured, and each of the heating sections I - VII has a separated heat source 7 individually. Each of the heat sources 7 blows temperature-controlled heated air toward the circuit board 1 from both upper side and lower side as shown by arrows 5, so that the object, or the circuit board 1 and the electronic components, is heated up to a required temperature.

Lower half of Fig. 1 illustrates temperature change, or temperature profile of the object heated in the reflow furnace 10. The circuit board 1 is introduced into the reflow furnace 10 at temperature  $T_r$  (normally, room temperature), and is gradually heated and reaches up to preheat temperature  $T_0$  at the heating section III, and is maintained at that temperature  $T_0$  for a time  $t_0$ .

Then, the circuit board 1 is heated up to temperature  $T_2$  at heating section VI, which is a temperature necessary for melting solder (targeted heating temperature), and is kept at that temperature  $T_2$  in the heating sections VI and VII

for a time  $t_2$  in total for melting the solder. After the solder is melted completely, the circuit board 1 is transferred out of the heating section VII, and is cooled down to atmosphere temperature level. During this cooling process, melted solder is solidified, and the mounted electronic components are secured onto the circuit board 1. A cooling device 11 may be used for facilitating cooling by blowing air or cooled air toward the circuit board 1. The illustrated temperature profile is only an example, and other required temperature profiles may be achieved by modifying heating condition of each of the heating sections I - VII.

For the case of heating in the reflow furnace 10 where achieving complete soldering of electronic components and avoiding heat destruction of these electronic components are required, some form of required conditions for heating are imposed for appropriately controlling heating of the reflow furnace 10, such as conditions (a) to (f) listed below. These conditions are also illustrated in Fig. 1. It is to be understood that such conditions may be applicable to solder reflow purpose, and some other conditions may also be arranged depending on the purpose of heating.

(a) Targeted heating temperature and heating time ( $T_2$ ,

t2): These are for keeping the object at a required temperature for a required time depending on a purpose of heating. In case of solder reflow heating, such heating temperature and heating time are necessary for keeping  
5 solder at above its melting point for a certain period of time to achieve complete melting.

(b) Required upper end temperature ( $T_{req}$ ): This is a temperature that the peak temperature of the object needs to achieve during heating process. In case of solder  
10 reflow heating, this temperature is needed for transforming the solder into a completely liquefied phase.

(c) Maximum temperature ( $T_{max}$ ): This is a maximum temperature that the object should not go over. In case of solder reflow heating, this is the upper limit temperature  
15 for avoiding heat destruction of the electronic components as well as the circuit board.

(d) Allowable limited temperature and time ( $T_l$ ,  $t_l$ ): These are limited temperature and time requirement that the object may endure during heating operation. In case of  
20 solder reflow heating, the electronic components and the circuit board should endure heating at this level of temperature and time without causing any heat destruction.

(e) Preheat temperature and time ( $T_0$ ,  $t_0$ ): These temperature and time are required for heating the object  
25 before main heating for the required purpose. In case of

solder reflow heating, these preheat conditions are for activating flux of cream solder, and for avoiding heat destruction of the electronic components due to steep temperature increase in reflow stage.

- 5 (f) Temperature variation ( $\Delta t$ ): This is a maximum allowable temperature difference among a plurality of measuring points of the object. In case of solder reflow heating, it is desirable to avoid any local temperature variances among electronic components. Since Fig. 1 shows  
10 a temperature profile for only a single measuring point (i.e., a single electronic component), this temperature variation  $\Delta t$  is not shown in the drawing.

It is necessary to determine an appropriate heating  
15 condition for each of the heating sections I - VII so that the heating object 1 may satisfy all of these required heating conditions during heating operation while the object is moved through the reflow furnace 10.

20 Now, some equations representing thermal relations between the heat source and the heating object are introduced. Fig. 2 shows one measuring point (i.e., one electronic component) on the heating object 1, and an energy to be applied to the measuring point. In this case, convection  
25 type heating by blowing heated air is used. The measuring

point has front surface  $S$ , thickness  $D$ , volume  $V$ , and physical characteristics of density  $\rho$ , specific heat  $C$  and rate of heat transfer  $h$  for convection type of heating. When temperature of the heated air to be blown is  $T_a$ , and  
 5 the surface temperature of the measuring point is  $T_s$ , heat energy  $Q$  to be transferred is shown by the following equation:

$$Q = h (T_a - T_s) S \quad (1)$$

10 Temperature change  $\Delta T$  of the surface temperature  $T_s$  of the measuring point during  $\Delta t$  seconds is generally represented by:

$$\frac{\Delta T}{\Delta t} = \frac{S}{\rho CV} \{h(T_a - T_s) + \alpha \varepsilon F (T_h^4 - T_s^4)\} \quad (2)$$

This equation may be modified to:

$$15 \quad \frac{\Delta T}{\Delta t} = \frac{hS}{\rho CV} (T_a - T_s) + \frac{\alpha \varepsilon FS}{\rho CV} (T_h^4 - T_s^4) \quad (3)$$

The latter half of the right side of the Equation 3 represents an element of radiation type heating, in which  $\alpha$  is rate of radiation absorption of the measuring point,  $\varepsilon$  is rate of radiation of the measuring point,  $F$  is  
 20 configuration factor between the heating source and the measuring point, and  $T_h$  is a temperature of the heat source (surface temperature) of radiation.

In case of convection type heating, the effect of such radiation type heating is typically negligibly small. Accordingly, the latter half of the right side of the equation may be eliminated for the case of convection type heating, in which case, the Equation 3 may be modified to:

$$\frac{\Delta T}{\Delta t} = \frac{hS}{\rho CV} (T_a - T_s) \quad (4)$$

By introducing a value of "m" represented by the following:

$$m = \frac{hS}{\rho CV} \quad (5)$$

the Equation 4 may be modified to:

$$\frac{\Delta T}{\Delta t} = m(T_a - T_s) \quad (6)$$

When the temperature  $T_s$  at an initial timing (i.e.,  $t = 0$ ) is assumed to be  $T_{int}$ , the Equation 6 may be modified to:

$$T_s = T_a - (T_a - T_{int}) e^{-m t} \quad (7)$$

In the Equation 7, both  $T_s$  and  $T_{int}$  represent surface temperature of the object, wherein  $T_{int}$  is the initial temperature at the beginning of heating, while  $T_s$  is an achieved temperature when the object is heated. Also in Equation 7, "e" represents the base of natural logarithms. In this specification, the Equation 7, which may be used for determining surface temperature  $T_s$  of the object, is hereinafter referred to as a "basic equation for heating".

By using the Equation 7, "m" shown in Equation 6 may be modified to:

$$m = \frac{1}{t} \ln \left[ \frac{T_a - T_{int}}{T_a - T_s} \right] \quad (8)$$

"In" in the Equation 8 represents natural logarithm. Among the elements in right side of the Equation 8, heating time  $t$ , heating temperature  $T_a$ , initial temperature  $T_{int}$ , and achieved temperature  $T_s$  are all measurable. Accordingly, when these elements are measured, the value of the "m" may be calculated by using these measured results. This means that, once the object is heated, and those values in right side of the Equation 8 are measured during such heating, the value of "m" may be determined by using the Equation 8, without knowing any physical characteristics of the object, such as density  $\rho$ , specific heat  $C$ , or rate of heat transfer  $h$  of the object shown in the Equation 5. In this specification, such calculated value of "m" is hereinafter referred to as an "m-value". As the m-value calculated from the Equation 8 is on a basis of the actually measured values of the object heated by a specific heating furnace, such m-value may be considered as a "heating characteristic" defined by a single quantified invariable. As is understood, the heating characteristic apparently represents physical characteristics of both the object and the heating furnace where the measurement is made.

The above mentioned physical characteristics of both the

heating furnace and the object include, but not limited to, the following.

Heating furnace: structure of furnace, inner volume, type of heat source, number and layout of heating sections, response of the heat source, heat interference, outer disturbance, etc.

Heating object: physical characteristics (surface area  $S$ , thickness  $D$ , specific heat  $C$ , rate of heat transfer  $h$ , etc.), configuration, initial temperature, surface conditions, etc. Especially for the case of a circuit board, mounting density and mounting locations of the electronic components, and circuitry layout on the surface of the substrate, etc. are also included.

In this specification, all of these factors related to heating features for both of the heating furnace and the object are referred to as "heating characteristic". The  $m$ -value may be considered as a single quantified invariable of "heating characteristic value" representing all these factors.

20

When an object is heated in a heating furnace, it is natural that heating condition may differ on point by point basis even in a single object. In the conventional thermal analysis relying on only physical characteristics of the object, above mentioned variety of factors of heating

25



characteristics are disregarded, hence simulation results may fluctuate. On the contrary, according to the present invention, such a drawback is avoided, since m-value which represents all the factors affecting heat condition is used.

5 Namely, by using the m-value, more practical and more accurate simulation results may be obtained in comparison with the conventional simulation using individual physical characteristics.

10 Fig. 3 schematically illustrates a sample circuit board 1 to be used for determining the m-value. A plurality of electronic components 3 are mounted on the sample circuit board 1, and thermocouples 4 are attached to three of these components 3a, 3b and 3c which are selected as measuring  
15 points. These thermocouples 4 are connected to outside recording device 6 for recording outcomes. The outcomes may be further transmitted from the recording device 6 to a computer or a heat controller via A/D converters, all of which are not shown in the drawing. Although only three  
20 components 3a, 3b and 3c are selected as measuring points in the drawing, the number of components to be measured are not limited to three. Generally, it is desirable to identify heating features (or restrictions) of all the components to be mounted on the circuit board, and to pick  
25 up some representative components that are in thermally

critical conditions, or components that are relatively difficult to raise temperature for their size and/or heat capacity for selected measuring points.

5 Fig. 4 shows measuring locations in one of the heating sections, in this case heating section I of reflow furnace 10 shown in Fig. 1. These measuring locations are the places where the m-values are to be determining. The vertical line in the drawing represents temperature of the measuring points (object), and the horizontal line represents time. In this specification, "measuring point" and "measuring location" differ from each other in that the "measuring point" is a place of the object to be heated where temperature is measured, while the "measuring location" is a place of the heating furnace where temperature is measured (i.e., a place of the heating furnace where the m-value is determined.). Although the horizontal line in the drawing represents time, this may be interpreted as measuring locations where the object passes at every  $t$  seconds. In the illustrated example, there are  $n$  (number) measuring locations in the heating section I having a common distance among each other, and the number  $n$  may be set at any desired number. The object is heated at each of these measuring locations during a time  $t$ , and temperature of the object raised gradually as time goes by,

10

15

20

25

or as the object moves from right to left in the drawing. The measuring locations do not necessarily have a common distance among each other, but rather each distance may be at any length.

5

The sample circuit board 1 at room temperature  $T_r$  is introduced into the heating furnace, and it is heated at each measuring location by heated air of temperature  $T_a$  which is blown from the respective heat source 7 (see Fig. 10 1). During the time temperatures of the measuring points 3a, 3b and 3c gradually raise from room temperature  $T_r$ , respective surface temperatures  $T_s$  are measured. Total  $n$  (number) of the  $m$ -values ( $m_1$ ,  $m_2$ ,  $m_3$ , ..., and  $m_n$ ) are calculated by using measured temperatures base on the 15 Equation 8. In the Equation 7 and 8, the initial temperature  $T_{int}$  at each measuring location is given by the achieved temperature  $T_s$  of the preceding measuring location.

Although the  $m$ -values for only the electronic component 3a are shown in Fig. 4, total  $n$  of the  $m$ -values for each of 20 the other components 3b and 3c are also calculated by measuring respective temperatures at each of the corresponding measuring locations. According to the experiment conducted by the present inventors, 100 25 measuring locations in a single heating section are elected

(i.e.,  $n = 100$ ), and total 100 m-values are calculated for each of the measuring points. The reason why so many measuring locations are elected is that heating condition even in a single heating section may vary depending upon temperature variation of the heated air and/or variation of blowing velocity of heated air, and especially at the entrance section of the heating furnace or at the boundary between the two adjacent heating sections, some effects caused by outside air and/or heat interference among heating sections are inevitable, hence determining many number of heating characteristics by narrowing each of the measuring locations is desirable for performing accurate simulation. On the contrary, in case only general feature of the heating furnace is needed, it may be sufficient, in the extreme case, to calculate only one m-value for each heating section, or even a single m-value of the most critical section of the entire heating furnace.

Although Fig. 4 shows only heating section I, in a similar manner, temperatures at each of the measuring locations for other heating sections II - VII are also measured, thereby the m-values are calculated for all of these locations. Assuming that each of the other heating sections has also 100 measuring locations, grand total of m-values to be calculated is 2100 (100 locations x 7 sections x 3

measuring points), and all these values are transmitted to a computer and/or a heat controller.

Now, a method of performing a simulation for identifying a temperature profile of the heated object due to changing heating condition of the reflow furnace by using thus calculated m-value for each measuring point and measuring location will be described hereinafter. As mentioned above, according to the present invention, the m-value representing heating characteristic may be determined based upon actual heating and measuring of the sample circuit board, without using physical characteristics such as density  $\rho$ , specific heat C, or rate of heat transfer h of the object to be heated. As the m-value thus determined represents the individual heating characteristic at each measuring point at each measuring location, temperature profile by changing heating condition may be simulated more effectively and more accurately, and verification by actually heating the sample circuit board may not necessarily be needed.

Figs. 5(a) - 5(e) show simulation result 1 performed according to the present embodiment by using the reflow furnace. Fig. 5(a) shows heating temperatures at each of the heating sections I - VII when the sample circuit board

1 is transferred in the reflow furnace 10 and heated. Temperature at each of the measuring points 3a - 3c at each of the measuring locations are measured during this heating process. The required conditions for heating the object at this experiment are as follows:

(a) Targeted heating temperature and heating time ( $T_2$ ,  $t_2$ ):  $T_2 = 220^\circ\text{C}$ , and  $t_2 \geq 20$  seconds

(b) Required upper end temperature ( $T_{\text{req}}$ ):  $230^\circ\text{C}$

(c) Maximum temperature ( $T_{\text{max}}$ ):  $240^\circ\text{C}$

(d) Allowable limited temperature and time ( $T_1$ ,  $t_1$ ):

$T_1 = 200^\circ\text{C}$ , and  $t_1 \leq 40$  seconds

(e) Preheat temperature and time ( $T_0$ ,  $t_0$ ):

$T_0 = 160^\circ\text{C} - 190^\circ\text{C}$ , and  $t_0 = 60$  seconds -  $120$  seconds

(f) Temperature variation ( $\Delta t$ ):  $<10^\circ\text{C}$

15

The sample circuit board 1 is introduced into heating section I from right side of Fig. 5(a), and then transferred in the reflow furnace 10 by passing through each of the heating sections I to VII in this order. First heating stage consisting of heating sections I to V is a preheat stage, and the second heating stage consisting of heating sections VI and VII is a reflow stage. In the example shown in the drawing, heating temperature at the preheat stage is set at  $190^\circ\text{C}$  for all the heating sections I - V in the stage. This temperature is the upper end of

25

allowable temperature range for preheating ( $T_0$ ). Heating temperature at the reflow stage is set at  $240^{\circ}\text{C}$  for both of the heating sections VI and VII in the stage, which is equal to the maximum temperature ( $T_{\text{max}}$ ) of the required condition. Transfer speed  $v$  of the sample circuit board 1 is 1.25 m/minute. As is understood, transfer speed  $v$  may be used for analysis instead of heating time  $t$  in case the object is transferred at a constant speed. For example, when a length of a single measuring location is  $l$ , time  $t$  may be converted into transfer speed  $v$  by using an equation  $v = l/t$ .

The sample circuit board 1 is introduced into the reflow furnace 10 whose heating condition is thus arranged, and then surface temperature  $T_s$  at each of the measuring points of the sample circuit board 1 is measured at each of the measuring locations of the reflow furnace 10. Subsequently,  $m$ -values are calculated by using these measured temperatures  $T_s$  as well as the heating temperatures  $T_a$  and the heating time  $t$  (or transfer speed  $v$ , in this case) of the heating furnace 10, based on the Equation 8.

When all of the  $m$ -values for each of the measuring points of the object and measuring locations of the heating furnace are calculated, simulation may be performed. Fig.

5(b) shows heating condition for simulation, in which heating temperature in heating sections I, II and VI are changed, while transfer speed  $v$  is unchanged ( $v = 1.25$  m/min.). Fig. 5(c) shows results of the simulation under such heating condition. These simulation results are obtained based on the Equation 7 by using the corresponding  $m$ -values calculated as described above.

In Fig. 5(c), only a part of the simulation results are shown including temperature variation  $\Delta t$  (item (f) of the required conditions listed above), maximum temperature  $T_{\max}$  (item (c) of the same), targeted heating time  $t_2$  over  $220^\circ\text{C}$  (item (a) of the same), and allowable limited time  $t_1$  over  $200^\circ\text{C}$  (item (d) of the same) for 3 measuring points (3a, 3b and 3b). All other simulation results corresponding to required conditions listed above may also be obtained, if necessary, by using total 700 surface temperatures  $T_s$  of each of the measuring locations for a single measuring point. For example, Fig. 5(c) shows simulation data at reflow stage only, but data at preheat stage (e.g., measured values at center location at the heating section III) are also available.

Fig. 5(d) shows verification results of the same items listed in Fig. 5(c) obtained by actually heating the sample



circuit board 1 under the same heating condition as shown in Fig. 5(b). Fig. 5(e) shows differences between the simulation results shown in Fig. 5(c) and the verification results shown in Fig. 5(d). As is understood from Fig. 5(e), maximum temperature difference between the simulation and verification is 2.4°C (228.1 - 225.7) at measuring point 3b, while maximum time difference is 2.4 seconds (28.0 - 25.6) at measuring point 3a. Considering the fact that a certain level of measuring variance caused by the reflow furnace and measuring device is unavoidable, such differences are quite small, and this can be an evidence that simulation according to the present embodiment is very accurate.

The figures within circles in Figs. 5(c) and 5(d) show that the peak temperature at the measuring point 3b did not meet the required upper end temperature ( $T_{req} = 230^{\circ}\text{C}$ ), which is necessary for transforming the solder into a completely liquefied phase. Accordingly, the simulation results (Fig. 5(c)) as well as the verification results (Fig. 5(d)) indicate that further temperature raise and/or transfer speed decrease at reflow stage is required.

Fig. 6 shows another experimental simulation results 2 according to the present embodiment. Contents of the

drawings in Figs. 6(a) - 6(e) are similar to those of Figs. 5(a) - 5(e), i.e., Fig. 6(a) shows heating condition for heating the sample circuit board 1 to obtain m-values. Naturally, the temperature of each of the measuring points of the sample circuit board 1 would not go over the heating temperature of the heat source. Accordingly, at the first heating timing, it may be desirable to set the heating temperature of the preheat stage at the highest allowable temperature range of preheating T0 (190°C) and similarly to set the heating temperature for the reflow stage at the maximum temperature Tmax (240°C). As further condition changes may be done in only one direction, which is a direction to increase heating temperatures when such condition changes are required, such temperature setting procedure makes a work for selecting subsequent heating condition for simulation easier. The transfer speed v for this heating is 0.8 m/minute. Required conditions for heating the object are the same as those in the previous experiment 1, except T2 and T1 are set at 200°C and 180°C, respectively.

Fig. 6(b) shows heating condition for simulation, in which transfer speed v is doubled ( $0.8 \rightarrow 1.6$  m/minute), while all other conditions are unchanged from the initial heating. When performing a simulation, this velocity change is

practically implemented by changing heating time  $t$  in the Equation 7. Namely, when the transfer speed is doubled, heating time at each heating section I - VII becomes half.

5 Fig. 6(c) shows results of simulation performed under the above modified heating condition, Fig. 6(d) shows results of verification by actually heating the sample circuit board 1 under the same heating condition, and Fig. 6(e) shows differences between Figs. 6(c) and 6(d). As is clear  
10 by Fig. 6(e), maximum temperature difference between simulation and verification is  $4.1^{\circ}\text{C}$  ( $214.9 - 210.8$ ), and maximum time difference is 4.6 seconds ( $19.8 - 15.2$ ). This may be considered as a marginal level in terms of simulation accuracy. In fact, this level of differences  
15 may be acceptable when compared to differences between forecast made by a skilled operator and the results by actual heating.

It should be recognized, however, that the differences  
20 shown in Fig. 6(e) are relatively large when compared to the differences shown in Fig. 5(e). Possible reason for this is that drastic condition change such as doubling transfer speed  $v$  in this case may deteriorate simulation accuracy due to heat interface developed when the sample  
25 circuit board 1 passes through the boundary between two

adjacent heating sections at high speed. Therefore, in case of performing a simulation under drastic condition change, such as doubling transfer speed, it may be desirable to re-calculate the m-values by actually heating the sample circuit board under such modified heating condition, and perform further simulation by using the re-calculated m-values.

Fig. 7 shows two temperature profiles at measuring point 3a shown in Figs. 5(c) and 5(d), one of which is a temperature profile of simulation results using m-values obtained according to the present invention, and the other is a temperature profile obtained by actually heating the sample circuit board at the verification step under the same heating condition. The vertical line represents temperature, and the horizontal line represents time (from right to left). The temperature profile of simulation results may be developed by plotting calculated surface temperatures obtained for 100 measuring locations for each heating section (total 700 locations for a single measuring point). As is clear from the drawing, the simulation results and verification results are almost identical, which is an evidence that the simulation according to the present embodiment is very accurate. It is also understood from the drawing that almost perfect temperature profile

may be developed when temperature simulation is made at total 700 locations for a reflow furnace.

Now, a method of thermal analysis using above described simulation will be described hereinafter by referring to a flow chart shown in Fig. 8. This method of thermal analysis may be used for determining an appropriate heating condition of a heating furnace in a manufacturing line, such as reflow heating line. First, at m-value determining stage, a sample and heating condition of the heating furnace are determined at step #1. Such heating condition may include, but not limited to, heating temperature and heating time (or transfer speed) of each heating section I - VII, measuring points of the sample circuit board, and measuring locations for each heating sections I - VII. At step #2, required conditions for heating the object are inputted. In this connection, it is desirable that aforementioned required items (a) - (f) ( $T_0$ ,  $T_1$ ,  $T_2$ ,  $T_{max}$ ,  $T_{req}$ ,  $\Delta T$ ,  $t_0$ ,  $t_1$ ,  $t_2$ ) are included, but it is also possible to include any other required conditions.

After such required conditions are determined, the sample circuit board 1 is introduced into the reflow furnace, and surface temperatures  $T_s$  (including the initial temperature  $T_{int}$ ) of each of the measuring points are measured by using

temperature measuring device (such as a thermocouple) at step #3. Then, at step #4, the m-values, or heating characteristic values, for each of the measuring locations and measuring points are calculated by using the heating condition and the measured temperatures. The method of how to calculate the m-value is the same as already described above. It should be noted, as mentioned above, that physical characteristics of the heating object and/or the heating furnace are not required for calculating the m-values. Further, the m-values thus calculated are considered as heating characteristic value which may represent all of the physical features of both heating furnace and the heating object.

After the m-values are calculated, the process goes into simulation stage. At step #5, heating condition for simulations are determined. At this step, heating temperature and heating time (or transfer speed) for each of the heating sections may be set at any desired level. In addition, as is described later, blowing speed of heated air may also be selected, if convection type of heating is used. At step #6, temperature profile is developed based on simulation results using the corresponding m-values calculated at step #4. Although only one temperature profile for a single measuring point is illustrated in Fig.

7, similar temperature profiles for all other measuring points may also be developed. Based on all these temperature profiles, at step #7, whether or not the required conditions for the first heating stage are satisfied is checked. In the process shown in the flow chart, this first heating stage corresponds to a preheat stage. Namely, at this step #7, whether required conditions of temperature  $T_0$  and time  $t_0$  for preheating (in the example shown before,  $T_0 = 150 - 190^{\circ}\text{C}$ ,  $t_0 = 60 - 120$  seconds) for all the measuring points are satisfied or not is checked.

If not all the measuring points satisfy the required conditions, the process goes back to step #5, and heating condition for simulation, such as heating temperature is re-set. As described above, if heating temperature for the first heating stage (preheat stage) was set at the highest temperature in the allowable range (in the previous example,  $190^{\circ}\text{C}$ ), it should be understood that, when the required conditions are not satisfied, such failure is due to shortage of heating, because temperature of the heated object would not go over the heating temperature. Accordingly, when re-setting the heating condition of the first heating stage, condition change of either raising the heating temperature or lengthening the heating time (or

decreasing transfer speed), or both of these is required. Generally, heating condition required for the first heating stage, or preheat stage, is not so severe as those for the second heating stage, since the second heating stage is more important for achieving the ultimate goal of heating.

Next, at step #8, whether or not required conditions for the second heating stage are satisfied is checked. In case of reflow heating, a severe temperature control is required in this second heating stage so as to assure complete soldering of the electronic components, and at the same time to prevent any heat destruction of these components. Although two checking steps #7 and #8 for the first and second heating stages are shown in the flow chart, other checking steps, like third or forth heating stages, may also be added, if necessary. On the contrary, if only one heating stage is required, one of the checking steps #7 and #8 may be eliminated.

If the required conditions of the second heating stage are not satisfied at the checking step #8, the process goes back to step #5 and heating condition for simulation is modified. For example, if the simulation results are the same as those shown in Fig. 5(c), the figure within a circle of required upper limit temperature ( $T_{req}$ ) for



measuring point 3b (228.1°C) does not meet the required condition of 230°C. Accordingly, modifying the heating condition for the reflow stage by either raising heating temperature or lengthening heating time (or decreasing transfer speed) is required at step #5 in order to meet such required conditions. As can be seen in Fig. 1, since a variety of required conditions are given like a network in this reflow stage, all these factors need to be considered when re-setting heating condition for simulation.

10

In this connection, in a prior art, after a sample circuit board is heated, a skilled operator determines the subsequent heating condition for the subsequent heating trial based on the preceding results, and such procedure is repeated. On the contrary, according to the present embodiment, once the m-values are calculated, simulations may be performed as merely a paper work by using the m-values. Therefore, even if a subsequent heating condition is set at somewhat random basis, such repeated simulation works do not take a long time. As an example, assuming 10 times of repeated simulations are required by changing heating condition at each time, it normally takes about 5 hours to complete the conventional works including waiting times for making the heating furnace in a stable condition after one trial of heating is completed. According to the

25

simulation of the present embodiment, such simulation works may be completed in about an hour. It is apparent that such simulations may be completed even more effectively when a computer is used, which will be described later.

5

If all the required conditions for reflow stage are satisfied at step #8, the appropriate heating condition is determined at step #11 as shown by an dotted line. Steps #9 and #10 are verification steps for confirming whether the heating condition determined through such simulation works actually satisfy the required conditions or not by actually heating a sample object. These steps #9 and #10 are optional, and as far as accuracy of the simulation works according to the present embodiment is assured, these steps may be eliminated. If results of the verification steps #9 and #10 show that required conditions are not satisfied, the process may go back to step #4, and m-values are re-calculated based on the results of the verification steps, and simulation steps are repeated. By such repetitions of simulation works by changing heating condition, more accurate temperature simulation results may be obtained.

Fig. 9 shows the experiment 3 which includes steps of:  
heating a sample circuit board and obtaining m-values;

performing a simulation by using the m-values; verifying simulation results by actually heating the sample circuit board under the same heating condition as the simulation; re-calculating m-values based on the data obtained at such verification process; and performing another simulation using the re-calculated m-values. Fig. 9(a) shows initial heating condition for each of the heating sections I - VII for heating the sample circuit board. The initial m-values are calculated based on such heating results. Fig. 9(b) shows heating condition elected for performing first simulation, and Fig. 9(c) shows some outcomes of resultant temperatures and times obtained by the first simulation. Fig. 9(d) shows corresponding verification results through actually heating the sample circuit board under the same heating condition as shown in Fig. 9(b), and Fig. 9(e) shows differences between the simulation results (Fig. 9(c)) and the verification results (Fig. 9(d)).

According to Fig. 9(e), maximum temperature difference is 3.4°C (239.4 - 236.0), and maximum time difference is 3.3 seconds (240.1 - 236.8), which are acceptable level of accuracy, although not so attractive when compared to other results such as those shown in Fig. 5(e), for example. Possible reason for this is that, in addition to temperature changes of the heating sections I, II, VI and

VII, transfer speed of the heating object is also considerably increased (from 0.8 to 1.35 m/minute). Especially, figures within circles in Fig. 9(d), which are t1 for measuring point 3a (41.4 seconds, compared to required <40 seconds), and Tmax for the measuring point 3c (240.1°C, compared to required <240°C) are out of the allowable range, which are not seen for the case of simulation results shown in Fig. 9(c).

10 Accordingly, second simulation under the heating condition shown in Fig. 9(f) is performed by using the corresponding re-calculated m-values for each of the measuring locations and measuring points obtained from verification results by actually heating the sample circuit board (Fig. 9(d)). In  
15 this second simulation, heating temperatures for the heating sections I - V and VII are lowered, while heating temperature for the heating section VI is raised in an intention to meet t1 and Tmax conditions of the measuring point 3c and 3a, respectively, which have failed at the  
20 previous heating process. The newly obtained simulation results, as shown in Fig. 9(g), meet all the required conditions for each of the measuring points 3a-3c.

Fig. 9(h) shows verification results achieved by actually  
25 heating the sample circuit board under the same heating

conditions as shown in Fig. 9(f). As is clear from Fig. 9(h), the resultant profile satisfies all the required conditions, including  $t_1$  and  $T_{max}$ , which have failed to meet at the previous verification step shown in Fig. 9(d).

5 Fig. 9(i) shows differences between the simulation results shown in Fig. 9(g) and verification results shown in Fig. 9(h). As is apparent from Fig. 9(i), maximum temperature difference between the two is  $1.0^{\circ}\text{C}$  ( $38.8 - 37.8$ ) and maximum time difference is 1.0 second ( $231.3 - 230.3$ ),  
10 which are far smaller than those of the first simulation results shown in Fig. 9(e). As is understood from the above, by repeating steps of calculating  $m$ -values and performing simulations, simulation accuracy is improved gradually. This is because heating condition for  
15 simulation comes close step by step to the aimed heating condition which may satisfy all the required conditions.

It may happen in some occasions that, on one hand the temperature of one of the measuring points of the heating  
20 object goes over the maximum temperature  $T_{max}$  ( $240^{\circ}\text{C}$ ), while on the other hand the temperature of one of the other measuring points of the same object may not achieve the required upper end temperature  $T_{req}$  ( $230^{\circ}\text{C}$ ) (i.e., large temperature variance exists among the measuring points).

25 It may be possible to find out solutions even such an

extreme case by, for example, adjusting transfer speed  $v$  (or heating time  $t$ ) of the heating object, but sometimes it may become impossible to determine an appropriate heating condition especially when allowable range of the condition is very narrow. According to the present invention, such critical situation may be identified within a short period of time by repeating simulations, which makes it possible to judge, at an earlier timing, that determining an appropriate heating condition is impossible. In case of prior art, trial and error procedures are to be continued even in such cases, which causes time loss of the total operation.

When temperature variance among the measuring points ( $\Delta T$ ) is extremely large, it may be considered that some problems and/or changes of physical conditions of the heating furnace may exist, such as the heated air blow does not reach to inner wall side of the furnace, or heated air blow is blocked locally for some reasons. According to the present invention, this kind of problems of the heating furnace may be foreseeable by periodically obtaining the  $m$ -values of the specific heating furnace, and monitoring trends of the  $m$ -values. In addition, when a plurality of heating furnaces are used,  $m$ -values for each of the furnaces may be obtained by heating the same sample under

the same heating conditions. By comparing these m-values among each other, differences of physical characteristics of these furnaces may be identified, and problems of specific furnace may be identified based on such comparison.

5 Accordingly, the m-values according to the present embodiment may also be used for the purpose of preventive maintenance and management of heating furnaces.

Furthermore, when differences of physical characteristics  
10 among a plurality of equipments are identified, such differences may be used for controlling a plurality of equipment as a whole. For example, once m-values are obtained by using a specific furnace A, simulation for the another furnace B may be performed without actually  
15 obtaining individual m-values for this particular furnace B, because such m-values for the furnace B may easily be identified by adjusting the m-values of the furnace A by using previously identified differences among the two.

20 The method of thermal analysis according to the present embodiment described above may be applicable even in a wider scope. One example of which is conducting a simulation by changing blowing speed of the heated air at one or more of the heating sections I - VII. In the above  
25 described embodiment, blowing speed of the heated air is

assumed to be constant (e.g., 5m/second). It is known, however, that heat transfer of the object may vary when blowing speed of the heated air is changed even when heating temperature is the same. Such kind of relations  
5 between heat transfer and blowing speed may be obtained by experiment, or even statistic data are available for some cases.

One example is shown in Fig. 10, which shows relations  
10 between blowing speed of the heated air and heating characteristic value, or m-value, obtained by experiments conducted by the present inventors. In the drawing, horizontal line represents blowing speed of the heated air (m/second), and vertical line represents m-value.  
15 According to the experiment results, such relations are approximately represented by the following equation when vertical line is y axis, and horizontal line is x axis:

$$y = 0.0006 x^2 - 0.0009 x + 0.0377 \quad (9)$$

By obtaining such relations beforehand, simulations  
20 including changing blowing speed of heated air may be conducted by adjusting m-values according to Equation 9. Other simulation procedures are the same as those described above.

25 In the above described embodiment, the object is heated by



convection type of heating. Another possible application of the m-value according to the present invention is to the radiation type heating, such as heating the object by infrared radiation. As explained before by using Equation 3, temperature change  $\Delta T$  of the heating object during the time  $\Delta t$  is shown by the equation:

$$\frac{\Delta T}{\Delta t} = \frac{hS}{\rho CV} (T_a - T_s) + \frac{\alpha \epsilon FS}{\rho CV} (T_h^4 - T_s^4)$$

The former half of right side of the equation is an element of convection type heating and latter half is an element of radiation type heating. The latter half was eliminated for the case of convection type heating as shown in Equation 4, since effect by radiation type heating is almost negligible for convection type heating. In a similar manner, for the case of radiation type heating, the former half of the right side of the equation may be eliminated as follows:

$$\frac{\Delta T}{\Delta t} = \frac{\alpha \epsilon FS}{\rho CV} (T_h^4 - T_s^4) \quad (10)$$

By replacing the Equation 4 with the Equation 10, heating characteristics, or m-values for the case of radiation type heating may be calculated. Rest of the simulation procedures are similar to those described above, hence a variety of simulations may be performed by using such m-values even for the case of radiation type heating.

Another possible application of the heating characteristics according to the present invention is to the case of cooling an object. In the heating furnace shown in Fig. 1, a cooling device 11 is provided at the exit of the heating furnace 10. When it is required not to leave the object (such as the case of a circuit board) at a high temperature for a long period of time, air or cooled air may be blown to the object for cooling the object rapidly. Even in such a cooling operation, in a similar manner as described above, m-values for cooling process may be calculated by cooling a sample object under predetermined cooling condition with known temperature of cooling air and cooling time, and by measuring temperature of each of the measuring points of the object. Rest of the procedures for performing temperature simulation is similar to those described above.

Such m-values representing heating characteristics (i.e., cooling characteristics, in this case) of both the cooling equipment and the object to be cooled may also be applicable to thermal analysis for purely cooling process. For example, m-values may be applied to cooling process having a temperature profile completely upside down relative to the profile shown in Fig. 1, with the initial

temperature  $T_r$  being an axis of contrast. Namely, m-values may be calculated by cooling the sample in the cooling equipment under predetermined cooling temperature and cooling time (or transfer speed of the object), and by  
5 measuring temperatures of at least one measuring point of the cooling object at each of at least one measuring location of the cooling equipment. Simulation for developing temperature profile may be performed by using these m-values. It is also possible to determine  
10 appropriate cooling condition which may satisfy required temperature profile of the cooling object.

When applying the method of the present invention for such cooling process, it should be understood that some  
15 terminologies in the above description need to be replaced with corresponding cooling terminologies, such as replacing "heating" with "cooling", "heated air" with "cooled air", "preheat" with "pre-cool", "upper" or "raise" of temperature with "lower" etc.. Instead of heated air or  
20 infrared radiation for heating, cooled air or freezer panel may be used as a cooling source. Therefore, in this specification, the term "heat" should include not only normal interpretation of heat, but also meaning "minus heating", i.e., cooling, unless otherwise specifically  
25 defined.

The heating furnace shown in Fig. 1 transfers the object through the furnace 10 by ~~using a~~ transfer device 8. The present embodiment may be applied to other type of heating furnace, such as a furnace without having a transfer device, for example. In such a heating furnace, the object is placed inside the furnace and heated in accordance with a desired temperature profile by changing heating temperature inside the furnace at certain time intervals without being moved inside the heating furnace. Accordingly, the heating sections I - VII structured in the heating furnace 10 shown in Fig. 1 are not necessarily required to have physically separated heating areas, but rather the heating sections should include a case of a single heating chamber (or area) which may heat an object at a variety of temperature conditions for certain time intervals inside the same chamber.

The second embodiment of the present invention will be described hereinafter. This embodiment relates to a program or a computer readable recording medium recording such a program, both of which may be used for performing aforementioned thermal analysis by using a computer.

The program and the computer readable medium of the

present embodiment basically include processing steps for implementing the thermal analysis described in the previous embodiment. Namely, the program of the present embodiment is configured to make a computer to process the steps of:

5     heating a sample object under certain heating condition (heating temperature and heating time) and measuring temperatures of the object, thereby calculating m-values, or heating characteristic values, using such measurement results based on the Equation 8, or otherwise receiving  
10    input of such m-value data obtained by a similar manner outside of the computer;

      determining the object, such as a circuit board, and determining heating condition for simulation;

      simulating temperature profile by calculating temperatures  
15    for each of the measuring points of the circuit board by using the heating condition for simulation and obtained m-values;

      checking whether or not the heating condition for the simulation satisfies required temperature profile by  
20    comparing the simulation results with the required conditions for heating;

      if the required conditions for heating are not satisfied, modifying the heating condition for the subsequent simulation based on the preceding checking process, and  
25    performing a simulation, again;

if the required conditions for heating are satisfied, making a judgment that the heating condition is appropriate for satisfying the required condition for heating; and

optionally, if the above steps are repeated in a closed  
5 loop over a predetermined time, making a judgment that determining appropriate heating condition to satisfy the required conditions for heating is impossible.

The steps listed above are basically the same as those  
10 described in the previous embodiment. Although, a certain algorithms are to be included in the program so that computer may modify and determine heating condition for the subsequent simulation by itself. The following describe such an algorithm for the case of reflow heating having the  
15 first heating stage (i.e., preheat stage) and the second heating stage (i.e., reflow stage), although the algorithm may be applicable to other types of thermal analysis in a similar manner.

20 The following description is made under the assumption that the required conditions for heating the object are the same as the previous embodiment, which are as follows:

(a) Targeted heat temperature and heating time ( $T_2$ ,  $t_2$ ):

$T_2 = 220^{\circ}\text{C}$ , and  $t_2 \geq 20$  seconds

25 (b) Required upper end temperature ( $T_{\text{req}}$ ):  $230^{\circ}\text{C}$

(c) Maximum temperature ( $T_{\max}$ ):  $240^{\circ}\text{C}$

(d) Allowable limited temperature and time ( $T_1$ ,  $t_1$ ):

$T_1 = 200^{\circ}\text{C}$ , and  $t_1 \leq 40$  seconds

(e) Preheat temperature and time ( $T_0$ ,  $t_0$ ):

5  $T_0 = 160^{\circ}\text{C} - 190^{\circ}\text{C}$ , and  $t_0 = 60 - 120$  seconds

These specific required conditions may be shown in some occasions in blocks in the following description.

Although item (f) (temperature variance:  $\Delta T$ ) is not included for simplicity in this case, such condition, or  
10 any other required conditions may be added, if necessary.

Referring to Fig. 8, the sample circuit board is heated at step #3, and m-values are calculated by using measured temperatures at step #4. A Heating condition for  
15 simulation is determined at step #5, and through such simulation, whether or not such heating condition satisfies required conditions is checked at steps #7 and #8. Fig. 11 shows steps including an algorithm that the computer may determines appropriate heating condition for simulation by  
20 itself during the process.

In Fig. 11, heating characteristic values (i.e., m-values) are obtained at step #21. Such value may be calculated through steps #1 - #4 shown in Fig. 8 for each of a  
25 plurality of measuring points and measuring locations.

Based on either actual heating of the circuit board or the results of the simulation, the measuring point which has achieved the highest temperature at the first heating stage is elected at step #22 (in case of the example shown in Fig. 4, measuring point 3c is to be elected). This is for confirming at step # 23 whether or not temperature of any of the measuring points goes over the allowable temperature range for the preheat stage, by electing and checking the measuring point 3c with the highest temperature at the preheat stage (confirmation step A). If the measuring point 3c is out of the allowable temperature range, this means that the measuring point 3c is over the upper end of the allowable range (190°C). In such a case, the heating condition is modified by lowering temperature based on a predetermined rule at step #24, and simulation is performed again at step #25, then the process goes back to step #22 to repeat the procedures described so far.

One of the possible predetermined rules to lower the heating temperature at step #24 is to lower the heating temperature down to the upper end temperature of the allowable range at the preheat stage (190°C). This is because each measuring point would not be heated beyond the allowable range, as far as the heating temperature is set at the upper end level of the allowable range. Other



possible rule to lower the heating temperature may be to identify temperature difference between the measured or calculated temperature and the upper end temperature of the allowable range (190°C) , and to lower the heating temperature by the amount of such temperature difference, or by the amount obtained by multiplying a certain ratio to such temperature difference. By inputting such predetermined rules to the computer beforehand, the computer can make a proper adjustment for setting the heating condition for subsequent simulation by itself at step #24.

Although not shown in the drawing, if the elected measuring point which has achieved the highest temperature at step #22 does not meet the lower end temperature of the allowable range (160°C), it is, of course, required to modify the heating condition by raising the temperature at step #24, and to perform a simulation again at step #25. The process then goes back to step #22 to repeat the aforementioned procedures. In general, however, heating condition with a heating temperature lower than the lowest level of the allowable range may not be selected when considering the fact that the temperature of the object to be heated would not go over the heating temperature. Accordingly, this adjustment is considered to be a

relieving remedy for exceptional cases. Possible rules to be provided to the computer beforehand for raising the heating temperature in such a case may be determined in a similar manner to the case for lowering the temperature as mentioned above (although adjustment direction is opposite).

If the temperature of the measuring point 3c satisfies the allowable range of the required conditions at step #23, then whether or not required preheating time (60 - 120 seconds) is satisfied is checked at step #26 (confirmation step B). If this requirement is not satisfied, the heating condition is modified either by raising the heating temperature or by increasing the heating time (or lowering the transfer speed) based on a predetermined rule at step #27 in an intention that the temperature of the object goes up to the required temperature (190°C) at an earlier timing in the preheat stage.

Fig. 12 shows one of the possible predetermined rules to raise the heating temperature at step #27. The drawing shows temperature profile of the measuring point 3c (or the object), wherein vertical and horizontal lines represents temperature and time (from right to left), respectively. The time in horizontal line is shown by the sequence of the heating sections I - VII. The object introduced into the

heating furnace at temperature  $T_r$  is heated gradually while the object is transferred in heating sections from I to V of the preheat stage, and reaches the required range of preheat temperature  $T_0$  (160 - 190°C) in the middle of the heating section III in the shown case. The object is kept at that preheat temperature level for time  $t$ . If this time  $t$  falls short of the required range of preheat time  $t_0$  (60 seconds), i.e., if  $t < t_0$ , temperature adjustment is made at heating sections I and II (i.e., any heating sections located in advance of the section III where the object first reaches the required temperature  $T_0$ ) by raising respective temperatures by, for example, 1°C. Simulation is performed based on the modified heating condition, and if the time  $t$  does not meet the required time  $t_0$  again, then the heating temperature of these heating sections I and II are adjusted one more time by, for example, 1°C. This procedure is repeated until the time  $t$  achieves the required time  $t_0$ . Temperature adjustment by every 1°C is just an example, and this may be bigger or smaller than 1°C.

20

Still referring to Fig. 12, one possible predetermined rule to increase the heating time at step #27 is to multiply a ratio of the required time  $t_0$  versus the calculated or measured time  $t$  ( $t/t_0$ ,  $<1$ ) to the preceding transfer speed of the object, or to divide the preceding

25

heating time by the same ratio. It may be determined beforehand whether adjusting at step #27 is to be made by raising the heating temperature or by lengthening the heating time, or by both of these.

5

Although not shown in Figs. 11 and 12, if the calculated or measured time  $t$  is over the required range of preheating time  $t_0$ , i.e., if  $t > 120$  seconds, the adjustment of the heating condition may be done in a similar manner, but  
10 adjusting direction is opposite. Namely, the heating condition is modified either by lowering the heating temperature by a predetermined amount for any heating sections located in advance of the heating section where the object reaches the required range of preheating  
15 temperature  $T_0$ , or by shortening the heating time at the preheat stage based on a predetermined rules, or by both of these based on a predetermined rule. Such predetermined rule for lowering the heating temperature or shortening the heating time may be similar to the above description,  
20 although direction is opposite. Modifying the heating condition in such a opposite direction may not be required in an ordinary situation, since the required conditions at the preheat sage are not so severe. Therefore, such an adjustment is considered to be a relieving remedy for  
25 exceptional cases.

If measuring point 3c which has achieved the highest temperature at the preheat stage could meet the required conditions at step #26 in Fig. 11, it is confirmed at step 5 #28 whether or not rest of the measuring points 3a and 3b also satisfy all the required conditions of temperature and time of preheat stage (confirmation step C). Since the measuring point 3c with highest achieving temperature has already met these conditions, only possible failure for 10 meeting the requirement by the other measuring points should be shortage of heating. Accordingly, if any measuring points fail to meet such required conditions, the heating condition is modified at step #29 either by lengthening the heating time (or decreasing transfer speed) 15 or by raising heating temperature, or by both of them based on a predetermined rule, and the process returns to step #25 to repeat the procedures described above. Possible predetermined rule for lengthening heating time at step #29 is to multiply preceding transfer speed with a ratio 20 closest to 1 among the ratios of the required time  $t_0$  (60 seconds) versus calculated or measured time  $t$  ( $t/t_0$ ,  $<1$ ) for each measuring point, or to divide the preceding heating time by the same ratio. Possible predetermined rule for raising heating temperature at step #29 is to 25 identify temperature differences between the measured or

calculated temperatures and the lower end temperature of the allowable range (160°C) for all the measuring points which failed to meet the required temperature range, and to raise the heating temperature by the amount same as the smallest temperature difference among all of the failed measuring points, or by the amount obtained by multiplying a certain ratio to the smallest temperature difference. Such adjustment rules may be inputted to the computer beforehand.

10

After it is confirmed that all the measuring points have met the required conditions for the first heating (preheat) stage at step #28 in Fig. 11, the process goes into the second heating stage, where more severe temperature control is required. For simplifying the case, it is assumed here that the figures shown in Fig. 5(c) are obtained as a result of a simulation (or actual heating) for three measuring points 3a-3c. At step #30 in Fig. 11, one measuring point which has achieved the lowest temperature in the reflow stage during such simulation or actual heating among all the measuring points is elected. The reason why the measuring point with the lowest temperature is elected is that, at this reflow stage for soldering, all the measuring points, including such the point with the lowest temperature, should achieve the required upper end

20

25

temperature (Treq: 230°C) anyway in order to make the solder on the circuit board to be transformed into a completely liquefied phase. In the example shown in Fig. 5(c), the measuring point 3b (peak temperature of which is 228.1°C as shown within a circle) is to be elected at step #30 (hereinafter, referred to "lower critical measuring point 3b").

When the lower critical measuring point 3b fails to meet the require upper end temperature Treq (230°C) as shown in this case, modification of the heating condition by raising the heating temperature is required. In this connection, care should be taken that the temperature of the other measuring point which has achieved the highest temperature during the heating or the simulation in the reflow stage (in the example shown in Fig. 5(c), the measuring point 3c) is also raised by such an adjustment, and that this temperature raise should not make the measuring point 3c to go over the maximum temperature Tmax (240°C). For this reason, temperature raise of this particular measuring point (measuring point 3c, in this case) should also be watched carefully (hereinafter, referred to as "upper critical measuring point 3c"). Rest of the measuring points (only measuring point 3a, in this case), excluding the lower and the upper critical measuring points 3b and 3c,

may be assumed that their temperature profiles are located (or sandwiched) between the lower and the upper critical measuring points throughout the heating process described hereinafter.

5

At step #31 of Fig. 11, at least one heating condition which may make the lower critical measuring point 3b to meet the required conditions for the reflow stage (the second heating stage) is detected by simulation. For this  
10 detecting purpose, an algorithm using the maximum temperature  $T_{max}$  ( $240^{\circ}\text{C}$ ) and the required upper end temperature  $T_{req}$  ( $230^{\circ}\text{C}$ ) may be used, which is described hereinafter. Fig. 13(a) illustrates the outline of the  
15 algorithm, in which vertical line represents temperature of the lower critical measuring point 3b and horizontal line represents time. In the drawing, 2 heating sections VI, VII are structured in the reflow stage, similar to the heating furnace shown in Fig. 1. The object to be heated is transferred from right to left, i.e., in the order of  
20 heating sections V, VI and VII, as time goes by.

In Fig. 13(a), the lower critical measuring point 3b which was heated up to the preheat temperature  $T_0$  through heating sections I - V of the preheat stage is introduced into the  
25 initial heating section VI of the reflow stage. The lower



critical measuring point 3b is then heated in the heating sections VI and VII in this order. Zone X with slanted lines denotes an area where temperature profile of the lower critical measuring point 3b should be located when it is heated in the heating sections VI and VII. The upper boundary of the zone X is defined by two lines, one of which is a temperature increase line between a point H of preheating temperature  $T_0$  at the beginning of heating section VI and a point E of the maximum temperature  $T_{max}$  at the end of the heating section VI, and the other line is between the point E at the end of heating section VI (or the beginning of heating section VII) and a point G of  $T_{max}$  at the end of the heating section VII. The lower boundary of the zone X is defined by a line between the point H of preheating temperature  $T_0$  at the beginning of the heating section VI and a point F of required upper end temperature  $T_{req}$  at the end of the heating section VII.

As far as the temperature profile of the lower critical measuring point 3b is located in the zone X, the point 3b satisfied at least two of the required conditions of the reflow stage, namely, the temperature of the measuring point 3b would not go over the maximum temperature  $T_{max}$  nor go below the required upper end temperature  $T_{req}$ . Although the zone X shown in the drawing is defined by all straight

lines between H and E, and H and F, such lines may be concave or convex, or other curved lines, or combination thereof, as far as the temperature profile of the measuring point 3b does not go over the maximum temperature Tmax.

5

Heating condition at heating sections VI and VII may be determined so as to locate the temperature profile of the lower critical measuring point 3b inside the zone X through simulation by using the m-values. More specifically, the heating temperatures of both of the heating sections VI and VII may be raised from the preheat temperature T0 (190°C) up to an given upper limit temperature physically defined by the heating furnace (for example, 300°C) irrespective to each other. Simulations are repeatedly performed by raising temperature of each of the heating sections VI and VII independently by every 2°C, for example, from the lowest temperature (190°C) to the highest temperature (300°C) in the predetermined range. For all of the combinations of such respective temperature changes of the heating sections VI and VII, corresponding temperature profiles of the lower critical measuring point 3b may be obtained through simulation by using the m-values. Among such combinations of temperature changes, any of the temperature combinations of the heating sections VI and VII which may locate the temperature profile of the lower

critical measuring point 3b inside the zone X are detected. Temperature raise by every 2°C is just an example, and this step of temperature raise may be larger, like every 4°C, or smaller, like every 1°C.

5

There may be some other heating furnace structures, in which, for example, the second heating stage has only one heating section VI, or more than two heating sections VI, VII, VIII ..., etc.. Figs. 13(b) and 13(c) shows examples  
10 of defining zone X in such cases. If the reflow heating stage has only one heating section VI, one possible way to detect heating condition at the heating section VI is, for example, to perform a simulation by changing the heating temperature at the heating section VI by every 2°C, and  
15 identify heating condition(s) which may locate the temperature profile of the lower critical measuring point 3b inside the zone X shown in Fig. 3(b). If the reflow heating stage has 3 (or more) heating sections, the zone X may be defined by 3 lines, as shown in Fig. 13(c), consist  
20 of: a line between a point H of temperature T0 at the beginning of the initial heating section VI and a point E of maximum temperature Tmax at the end of the same heating section VI; a line between the point E and a point G of maximum temperature Tmax at the end of the last heating  
25 section (section VIII, in this example); and a line between

the point H and a point F of the required upper end temperature  $T_{req}$  at the end of the last heating section (section VIII, in this case). Simulations are then repeatedly performed for all possible combinations by changing temperature by every  $2^{\circ}\text{C}$  for each of the heating sections independently. Those zone X shown Figs. 13(a) - 13(c) are only examples, and other kind of zone may be defined. Lines between H and E, and H and F may not necessarily be straight lines, as described above.

Fig. 14 shows some of the temperature profiles of the lower critical measuring point 3b detected through simulations by changing combination of heating temperatures of the heating section(s) as described above. Fig. 14 shows temperature profiles at the reflow stage only (profiles at the preheat stage are not shown). In the example shown in Fig. 14, 6 heating conditions (or 6 combinations of heating temperatures at heating sections VI and VII) corresponding to 6 temperature profiles shown in the drawing could satisfactorily locate these individual profiles inside the zone X. Each of these 6 profiles have met temperature requirements, i.e., peaks of these profiles are lower than the maximum temperature  $T_{max}$  and higher than the required upper end temperature  $T_{req}$ . Also, for each of the 6 profiles, corresponding heating temperature

combination of the heating sections VI and VII is identified on one by one basis.

Now back to Fig. 11, it is confirmed at step #32 whether or not each of the detected profiles of the lower critical measuring point 3b satisfy other required conditions, i.e., targeted heating temperature  $T_2$  and time  $t_2$  (equal to or more than 20 seconds over  $220^{\circ}\text{C}$ ) (confirmation step D). If none of the identified profiles can meet such requirement, it means that heating was not sufficient, and the process goes to step #33 where the heating condition is modified by lengthening heating time (or reducing transfer speed) based on a predetermined rule, and then the process goes back to step #25 to repeat the procedures described above.

One possible example of the predetermined rule for lengthening heating time at step #33 is to multiply preceding transfer speed with a ratio closest to 1 among the ratios of the required time  $t_2$  (20 seconds) versus simulated or measured time  $t$  ( $t/t_2$ ,  $<1$ ) for all the identified temperature profiles, or divide the preceding heating time by the same ratio.

If at least one of the identified temperature profiles of the lower critical measuring point 3b meets such

requirement at step #32, it is confirmed next at step #34 whether or not such temperature profile(s) satisfy another heating condition at the reflow stage, i.e., allowable limited temperature  $T_1$  and time  $t_1$  (equal to or less than 40 seconds over  $200^{\circ}\text{C}$ ) (confirmation step E). If none of the selected temperature profiles could meet such requirement, this means that the object is overheated. In this case, the heating condition is modified by shortening the heating time (or increasing transfer speed) based on a predetermined rule, and then the process goes back to step #25 to repeat the procedures described above. One possible example of the predetermined rule in this case is to multiply precedent transfer speed with a ratio closest to 1 among ratios of the allowable limited time  $t_1$  versus simulated or measured time  $t$  ( $t/t_1, >1$ ) for all the detected temperature profiles, or divide the precedent heating time by the same ratio.

If at least one of the identified temperature profiles of the lower critical measuring points 3b have met such requirement at step #34, one of the profiles which has met the targeted heating time  $t_2$  (equal to or more than 20 seconds) by the smallest time difference (or closest to 20 seconds) is elected (in a example shown in Fig. 14, profile A is to be elected). The lower critical measuring point 3b

has achieved the lowest temperature at the time of sample heating among all the measuring points as described before, and now the elected temperature profile (profile A in Fig. 14) of the same measuring point 3b has satisfactorily meet  
5 all the required conditions in the reflow stage. It may be assumed that profiles for rest of the measuring points 3a and 3c are all located above this profile A (upper side, i.e., at a side of higher temperature and longer heating time). Therefore, the heating condition of the heating  
10 sections VI and VII corresponding to the temperature profile A for the measuring point 3b may temporarily be determined as the appropriate heating condition at step #36 which may be considered to satisfy all the required conditions for heating the object.

15

Next, at step #37, based on the above temporarily determined heating condition, simulation is performed to develop temperature profiles for rest of the measuring points, in an assumption that they are heated under the  
20 same heating condition. It is then confirmed based on the simulation results at step #38 whether or not the rest of the measuring points actually satisfy each of the required conditions of the reflow stage (confirmation step F). In this connection, the upper critical measuring point 3c  
25 which has achieved the highest temperature at sample

heating timing is to be checked first, by confirming whether or not it can meet all the required conditions including the maximum temperature  $T_{max}$ . If the upper critical measuring point 3c fails to meet the required conditions for heating, it can be judged instantly that such temporarily determined heating condition could not be a final solution even without confirming whether rest of the measuring points satisfy the required conditions or not.

10 If it is confirmed that the upper critical measuring point 3c could satisfy all the required conditions through simulation, it may be considered that temperature profiles for rest of the measuring points (only 3a, in this example) are located (i.e., sandwiched) between the lower and the upper critical measuring points 3b and 3c. Therefore it may be judged that the temporarily determined heating condition at step #36 may satisfy all the required conditions for heating at all the measuring points. Nevertheless, it may be desirable to perform simulation and to confirm whether or not the rest of the measuring points also satisfy the required conditions for heating, just in case.

25 If any one of the measuring points fails to meet the required conditions through simulation at step #38, another



adjustment of the heating condition is required. In this case, the reason not to meet the required conditions is apparently over heated, because it was already known that the lower critical measuring point 3b with lowest temperature could have met the required conditions. Therefore, the heating condition is modified by shortening the heating time (or increasing transfer speed) based on a predetermined rule at step #35, and then the process goes back to step #25 to repeat the procedures described above.

When modifying the heating condition by shortening the heating time at step #35, one possible example of the predetermined rule is to multiply preceding transfer speed with a ratio closest to 1 among ratios either of the targeted heat time  $t_2$  versus corresponding simulation result  $t$  ( $t/t_2, >1$ ), or of the allowable limited time  $t_1$  versus corresponding simulation result  $t$  ( $t/t_1, >1$ ), or among both of these ratios. It is also possible to divide the preceding heating time by the same ratio.

Through all the steps described above, when it is confirmed that all the required conditions are met at step #38, such temporarily determined heating condition may finally be determined as the appropriate heating condition at step #39. If the object is heated under such finally

determined heating condition, it is assumed at least through simulation procedures that required conditions at both first and second heating stages are satisfied for all the measuring points. Although not shown in the flow chart of Fig. 11, it is also possible to verify whether or not such finally determined heating condition actually satisfy all the required conditions by heating a sample object under the same heating condition and measuring temperatures and times at all the measuring points to obtain actual temperature profiles.

In Fig. 11, when heating condition fails to meet the required conditions at any of the confirmation steps A - F and the heating condition is modified, the process should pass through a corresponding counting step #50 as shown in the drawing. Whenever the process goes through any one of step #50, such passage time n is counted. It may happen some time that the adjustment is repeatedly required and the process goes into a closed loop. In such a case, repeated passage time n in the closed loop is counted, and if the time n goes over a predetermined threshold number, it may be judged at step #51 that determining an appropriate heating condition to meet the required conditions is impossible. This is an optional procedure for finding a conclusion in a shorter period of time when

determining appropriate heating condition deems impossible. In case of prior art where actual heating and measuring of a sample object are required, it is difficult to find a conclusion of impossible case in such a short period of time. When outputting the conclusion at step #51, it may be desirable for further analysis to identify which conditions are not met by how much temperature and/or time discrepancies. According to the present embodiment, such data are easily available through the simulation as described above.

Even when appropriate heating condition to satisfy all the required conditions is not determined, there should be a case where approximate heating condition is needed in any event, which is in a condition almost satisfying the requirements. Algorithm for complying with such a need may be arranged as follows. Figs. 15(a) - 15(c) show repeated simulation results of the heating time  $t_2$  at the targeted heating temperature  $T_2$  (220°C) and the heating time  $t_1$  at the allowable limited temperature  $T_1$  (200°C) for each of the measuring points 3a - 3c when the heating condition is modified. At Fig. 15(a), the time  $t_1$  of the upper critical measuring point 3c (42 seconds) fails to meet the required condition (less than 40 seconds), which may be found at step #38 (confirmation step F) of Fig. 11. Thus heating

condition is modified at step #35 by shortening the heating time, and simulation is performed again.

Fig. 15(b) shows results of such a repeated simulation.

5 Although the upper critical measuring point 3c could meet the required time (less than 40 seconds) by the above adjustment, the lower critical measuring point 3b (18 seconds) fails to meet the required time (more than 20 seconds) this time, as shown within a circle. According to  
10 flow chart of Fig. 11, this is a failure at step #32 (confirmation step D), and the process should go to step #33 for modifying the heating conditions by lengthening heating time, and simulation should be repeated. According to such procedure, however, it is apparent that if heating  
15 time is lengthened, the upper critical measuring point 3c would again fail to meet the required time  $t_1$  (less than 40 seconds), and therefore same procedures are to be repeated within a closed loop.

20 Fig. 16 shows a flow chart to determine an approximate solution for such a case. Fig. 16 shows only the second heating stage (reflow stage) for easier understanding, but it is, of course, also possible to add the first heating stage (preheat stage) to the flowchart, similar to the one  
25 shown in Fig. 11. In the flowchart shown in Fig. 16, steps

#52 - #54 are added to the second heating stage. In Fig. 16, if the situation turned into the case as shown in Fig. 15(a) and 15(b), the process goes to step #52 after failure at step #32, and it is checked at step #52 whether the allowable limited time  $t_1$  (less than 40°C) at temperature  $T_1$  (200°C) for the upper critical measuring point 3c is already reached a limited level or not. The terms "limited level" means that the simulated time  $t$  is already reached the limited time  $t_1$  (40 seconds in this case), or even over the limited time  $t_1$ . If the upper critical measuring point 3c already reached such a limited level, it is apparent that the upper critical measuring point 3c can not satisfy the required condition of  $t_1$  any longer, if the process goes to step #33 to lengthen the heating time. In this connection, if the process once went to step #38 where the upper critical measuring point 3c failed to meet the required time  $t_1$ , and subsequent adjustment was made by shortening heating time at step #35 for repeating procedures through step #25, and yet the conditions at step #32 were not cleared, it is judged at step #52 that the upper critical measuring point 3c has already reached to the point of such limited level.

In such a case, the process goes to step #53, and it is checked whether or not all the measuring points except the

lower critical measuring point 3b have met all the required conditions. This step corresponds to a procedure at step #38. Since it is already known at this stage that the upper critical measuring point 3c is at the limited level, and the temperature profiles of rest of the measuring points are assumed to be located (i.e., sandwiched) between the lower and the upper critical measuring points, step #53 may be skipped as shown by a dotted line in the drawing.

10 If the condition at step #53 is satisfied (i.e., "Yes" in the flowchart), the process goes to step #54 to modify the heating condition by lengthening heating time based on a predetermined rule in order to make the lower critical measuring point 3b to satisfy the targeted heating temperature  $t_2$ . The heating conditions thus adjusted at step #54 may be deemed to be the appropriate heating conditions at step #39. Fig. 15(c) shows a simulation results performed under the heating condition determined in this manner. Since the heating time is lengthened at step 20 #54, the lower critical measuring point 3b could meet the targeted heating time  $t_2$  (more than 20 seconds). Instead, the upper critical measuring point 3c fails to meet the allowable limited time  $t_1$  (less than 40 seconds) as shown within a circle. Especially for the case of reflow process, 25 the main purpose for heating is to thoroughly melt the

solder, hence first priority should be given to making all the measuring points to meet the targeted heating temperature T2 and corresponding heating time t2. If the main purpose is different, it is possible to use other  
5 algorithm in which the first priority may be given to the other conditions, such as to meet the allowable limited temperature T1 and time t1. One possible example of the predetermined rule at step #54 is to multiply preceding transfer speed with a ratio of the targeted heating time t2  
10 versus corresponding time t of simulation results for the measuring point 3b ( $t/t_2$ ,  $<1$ ), or to divide the preceding heating time by the same ratio.

If any of the other measuring points fail to meet the  
15 required conditions at step #53, judgment should be made at last at step #51 that determining an appropriate heating conditions deems impossible. This judgment, however, should depend on the purpose of the heating. If any approximate heating conditions are needed at any event,  
20 step #53 may be skipped and the process goes to steps #54 and #39 to determine the approximate final solution.

The above description made by referring to Fig. 11 relates to a thermal analysis program which includes heating  
25 conditions of the first (preheat) and the second (reflow)

heating stages. It is also possible to apply a similar program to the other type of heating processes. For example, if only one heating stage is arranged, the thermal analysis may be similarly performed by using either the first heating stage or the second heating stage shown in Fig. 11. If three or more heating stages are required, the thermal analysis may also be performed by selectively using the first or the second heating stage, or both of the heating stages in a repeated manner.

In the above description, when the heating condition fails to meet the required conditions at any confirmation steps A - F, all the procedures are repeated from the confirmation step A, which is the first confirmation step of the first (preheat) heating stage for all cases. If the heating condition, including the heating temperature and heating time (or transfer speed of the object) is controllable independently from each other among the first heating stage and the second heating stage, the process may not necessarily go back to the first confirmation step A, which is the very beginning of the heating process, all the time. Instead, if the heating condition failed to meet the required conditions of the second (reflow) stage at any of the confirmation steps D - F, modification of the heating condition may be made only for the second heating stage,



and the process may go back to the confirmation step D (or step #30) to repeat the procedures for the second heating stage only, as shown by dotted line in Fig. 11.

5 In the procedure described above, each of the required conditions for heating, such as the maximum temperature  $T_{\max}$  or allowable limited temperature  $T_1$  and time  $t_1$ , is determined as a single figure (or a single condition) for the entire object to be heated, such as a circuit board.

10 This means that such determined conditions are to be applied equally to all the electronic components mounted on the circuit board. Background for this is that if the most thermally critical electronic component among all the components to be mounted on the circuit board could meet

15 the required conditions, rest of the electronic components may more easily meet the same conditions. Alternatively, it is also possible to determine separated required conditions on component by component basis, and such separated conditions may be used as auxiliary standards for

20 determining appropriate heating condition. For example, even when simulated temperature of one of the measuring points goes up to  $245^{\circ}\text{C}$ , for example, which is over the required conditions of maximum temperature  $T_{\max}$  of  $240^{\circ}\text{C}$ , such heating conditions may be acceptable as far as the

25 separated required conditions for that particular

electronic component permits temperature to go up to, for example, 250°C. It is especially beneficial to have such relieving logics for determining appropriate heating conditions in a thermally critical case where determination  
5 of heating condition seems difficult.

The above description is made on a basis of a reflow heating furnace in which lengthening/shorting of heating time and increasing/decreasing transfer speed may  
10 interchangeably be applied since the object to be heated is transferred inside the heating furnace. In case of a batch type of heating furnace which does not have any transfer device, adjusting heating time may only be applicable.

15 The recording medium described at the beginning of the present embodiment is a computer readable recording medium which may make the computer to process the above-described procedures.

20 The third embodiment of the present invention will now be described hereinafter. The present embodiment relates to an apparatus for thermal analysis for performing an analysis as described in the first embodiment, a heat controller for controlling temperature of a heating furnace  
25 by utilizing the program or the recording medium as

described in the second embodiment, and a heating furnace using such a heat controller. The heating furnace shown in Fig. 1 is one example of the present embodiment. Referring to Fig. 1, the heating furnace 10 has a plurality of heating sections I - VII, each of which has a heat source 7. Temperature of each heat source 7 may be independently controlled. The heating object 1 is introduced into the heating furnace 10 by transfer device 8, and then it is heated in accordance with a required temperature profile while it is transferred through the individual heating sections I - VII.

The heat controller 20 is connected to or integrally formed into the heating furnace 10, and designed to control heating temperature and/or transfer speed of the object at each of the heating sections I - VII independently. The heat controller 20 is capable of calculating m-values, or the heating characteristic values as described in the first embodiment, based on temperatures measured during heating of a sample object 1. Furthermore, the heat controller 20 is capable of determining heating condition which may satisfy corresponding required conditions, and is capable of controlling the heating furnace 10 in accordance with the predetermined required conditions for heating. In this connection, the heat controller 20 may use the recording

medium 30 recording the program described in the second embodiment.

Fig. 17 schematically shows a block diagram of the heat controller 20 according to the present embodiment. The heat controller 20 has a input means 28, through which the heating condition including heating temperature 21 and heating time 22, as well as the required conditions 27 for heating the object may be inputted. Separately, measured temperatures 23 obtained by heating the sample object 1 in the heating furnace 10 may be inputted for calculating the heating characteristic values (m-values). The heat controller 20 also has a memory 24 where the basic equation for heating (Equation 7) used for calculating temperatures of the object, and a equation for calculating m-values (equation 8) are stored. The processing means 25 may calculate m-values by using such inputted information, and may perform simulation by using the m-values based on modified heating condition. The heat controller 20 also has a reading means 29 for reading the recording medium 30 so as to use the algorithm recorded in the medium 30. Through these means, the heat controller 20 may determine heating condition appropriate for heating the object in accordance with the required conditions based on the simulation results. These outcomes are outputted through

the output means 26, and the heating furnace 10 is controlled based on the outcome. The recording medium 30 described in the second embodiment may be used for such purposes.

5

The heat controller 20 shown in Fig. 17 has a function to control the heating furnace 10 through the output means 26. The heat controller 20 may also be used as an apparatus of thermal analysis for performing a simulation to identify  
10 temperatures of the heating object when it is heated under the inputted heating condition by using the calculated m-values. Furthermore, the heat controller 20 may also be used as an apparatus of thermal analysis for performing temperature simulation in accordance with a predetermined  
15 algorithm, if necessary, by including the reading means 29 for reading the recording media as described in the second embodiment.

As described before, the reflow furnace shown in Fig. 1  
20 illustrates only an example of the present embodiment, and the present embodiment may also be applicable to a heating furnace without having a transfer device. In other word, the present embodiment may be applied to a variety of heating equipments having temperature administering and  
25 controlling functions, such as heat treatment furnace for

metallic materials, sintering furnace for powder metallurgy,  
baking oven such as used for ceramic materials, melting  
furnace for melting a variety of materials, or incinerating  
equipment for burning wasted material in accordance with  
5 respective desired temperature profiles

Furthermore, as described before, the term "heat" in this  
description may have a wider meaning including minus-  
heating, thus the heating furnace of the present invention  
10 may include equipments for cooling, such as refrigerator,  
freezer, cooler etc.. The method for performing heating  
simulation by using m-values of the present invention may  
also be applicable in a completely similar manner to the  
case of cooling as a method for performing cooling  
15 simulation.

The detailed description and specific examples by  
referring to several embodiments are give by way of  
illustrative purpose only, and it should be noted that  
20 various changes and modifications within the spirit and  
scope of the invention will become apparent to these  
skilled in the art from this detailed description.

## CLAIMS

1. A method of thermal analysis, wherein heating characteristic at any measuring point of an object at any measuring location of a heating furnace is determined as a single invariable by using temperature measured at the measuring point of the object and heating temperature and heating time at the measuring location of the heating furnace, which heating characteristic represents physical characteristics of both of the heating furnace and the object to be heated.

2. A method according to claim 1, wherein changes of said physical characteristics and/or defects of the heating furnace are detected by obtaining said invariable periodically and analyzing variance of said heating characteristic.

3. A method according to claim 1, wherein changes of the physical characteristics and/or defects of a specific heating furnace are detected by obtaining said invariables from a plurality of heating furnaces and comparing said heating characteristics of said plurality of heating furnaces among each other.

4. A method according to claim 1, wherein temperature profile of the object when the object is heated under given heating condition is simulated by using the invariable.

5. A method according to claim 1, wherein appropriate heating condition of the heating furnace for heating the object in accordance with a required temperature profile is determined by using the invariable.

5 6. A method according to claim 5, wherein appropriate heating condition for each of a plurality of heating sections structured in the heating furnace for heating the object in accordance with a required temperature profile are determined by using the invariable  
10 obtained from at least one measuring location for each of the plurality of heating sections.

7. A method according to claim 4, wherein said heating condition comprises either one of heating temperature, heating time, transfer speed of the object in  
15 the heating furnace, or blowing speed of heated air for heating the object, or any combination thereof.

8. A method according to claim 1, wherein said heating furnace is either one of reflow furnace, heat treatment furnace, sintering furnace, baking oven, melting  
20 furnace, or incinerating equipment.

9. A method according to claim 1, wherein said invariable is an m-value defined by:

$$m = \frac{1}{t} \ln \left[ \frac{T_a - T_{int}}{T_a - T_s} \right]$$

wherein  $\ln$  is natural logarithm,  $T_a$  is heating temperature



of the measuring location of the heating furnace,  $T_{int}$  is initial temperature of the measuring point of the object at the measuring location,  $T_s$  is achieved temperature when the object is heated at the measuring location, and  $t$  is heating time at the measuring location.

10. A method according to claim 9, wherein temperature  $T_s$  of the object is determined when heating temperature  $T_a$  and heating time  $t$  of the heating furnace are given, or heating temperature  $T_a$  and heating time  $t$  are determined when required temperature  $T_s$  is given by using said  $m$ -values based on a following basic equation for heating:

$$T_s = T_a - (T_a - T_{int})e^{-mt}$$

wherein  $e$  in the equation represents the base of natural logarithms.

11. A method according to claim 9, wherein said  $m$ -value is adjusted based on a predetermined equation of relationship between the blowing speed of the heated air and the  $m$ -value when the blowing speed of the heated air of the heating furnace is changed.

12. A method of thermal analysis for determining appropriate heating condition for heating an object in a heating furnace in accordance with a required temperature profile corresponding to predetermined required conditions for heating the object, wherein said method comprises steps

of:

determining a sample object to be heated and heating condition of the heating furnace;

5 determining required conditions for heating the object;

heating the sample object, and measuring temperature of at least one measuring point of the sample object at a plurality of measuring locations of said heating furnace;

10 calculating heating characteristic value for each measuring point at each measuring location based on measured temperature of the measuring point as well as heating temperature and heating time at each measuring location;

15 modifying the heating condition by changing either one of or both of the heating temperature and the heating time of at least one of the measuring locations;

20 simulating temperature of each measuring point of the object at each measuring location of the heating furnace under the modified heating condition by using the corresponding heating characteristic values based on a basic equation for heating;

25 determining that the modified heating condition is appropriate for satisfying the required temperature profile when a temperature profile developed from the simulated temperature meets said required conditions, and

re-modifying the heating condition when the developed temperature profile does not meet said required conditions, and repeating the above procedures until the developed temperature profile meets the required conditions.

5        13. A method of thermal analysis for determining appropriate heating condition for heating an object in a heating furnace having a plurality of heating sections in accordance with a required temperature profile corresponding to predetermined required conditions for  
10 heating the object, wherein said method comprises steps of:

      determining a sample object to be heated and heating condition of each heating section of the heating furnace;

      determining required conditions for heating the object;

15        heating the sample object, and measuring temperature of at least one measuring point of the sample object at at least one measuring location of each of the heating sections of the heating furnace;

      calculating heating characteristic value for each  
20 measuring point at each measuring location based on the measured temperature of the measuring point as well as heating temperature and heating time at each measuring location;

      modifying the heating condition by changing either one  
25 of or both of the heating temperature and the heating time

of at least one of the heating sections;

simulating temperature of each measuring point of the object at each measuring location of the heating furnace under the modified heating condition by using the corresponding heating characteristic values based on a basic equation for heating;

determining that the modified heating condition is appropriate for satisfying the required temperature profile when a temperature profile developed from the simulated temperature meets said required conditions, and

re-modifying the heating condition when the developed temperature profile does not meet said required conditions, and repeating the above procedures until the developed temperature profile meets the required conditions.

14. A method according to claim 12, wherein said heating furnace is either one of reflow furnace, heat treatment furnace, sintering furnace, baking oven, melting furnace, or incinerating equipment.

15. A method of thermal analysis for determining appropriate heating condition for heating an object comprising a circuit substrate having printed solder thereon while the object is transferred in a heating furnace having a plurality of heating sections, forming a preheat stage and a reflow stage in accordance with a required temperature profile corresponding to predetermined

required conditions for heating the object, wherein said method comprising steps of:

determining a sample object to be heated and heating condition of each heating section of the heating furnace;

5 determining required conditions for heating the object in both of the preheat stage and the reflow stage;

heating the sample object, and measuring temperature of at least one measuring point of the sample object at at least one measuring location of each of the heating sections of the heating furnace;

10

calculating heating characteristic value for each measuring point at each measuring location based on measured temperature of the measuring point as well as heating temperature and heating time at each measuring location;

15

modifying the heating condition by changing either one of or both of the heating temperature and the heating time of at least one of the heating sections;

simulating temperature of each measuring point of the object at each measuring location of the heating furnace under the modified heating condition by using the corresponding heating characteristic values based on a basic equation for heating;

20

determining that the modified heating condition is appropriate for satisfying the required temperature profile

25

when a temperature profile developed from the simulated temperature meets said required conditions of both of the preheat stage and the reflow stage, and

re-modifying the heating condition when the developed temperature profile does not meet said required conditions of the preheat stage or the reflow stage, and repeating the above procedures until the developed temperature profile meets the required conditions.

16. A method according to claim 12, wherein the method further comprises steps of:

verifying the heating condition which has met the predetermined required conditions through simulation by actually heating the sample object under the same heating condition and measuring temperature at each measuring point of the sample object at each measuring location of said heating furnace, before determining that such heating condition is appropriate for satisfying the required temperature profile;

determining that the verified heating condition is appropriate for satisfying the required temperature profile when a temperature profile developed at the verification step meets the required conditions, and

re-calculating the heating characteristic value for each measuring point at each measuring location based on the results of the verification step when the developed

temperature profile at the verification step does not meet the required conditions, and repeating the above procedures until the developed temperature profile meets the required conditions.

- 5           17. A method according to claim 12, wherein said heating characteristic value is an m-value defined by:

$$m = \frac{1}{t} \ln \left[ \frac{T_a - T_{int}}{T_a - T_s} \right]$$

wherein  $\ln$  is natural logarithm,  $T_a$  is heating temperature of the measuring location of the heating furnace,  $T_{int}$  is  
10 initial temperature of the measuring point of the object at the measuring location,  $T_s$  is achieved temperature when the object is heated at the measuring location, and  $t$  is heating time at the measuring location.

- 15           18. A method according to claim 12, wherein the basic equation for heating is defined by:

$$T_s = T_a - (T_a - T_{int}) e^{-m t}$$

wherein  $T_a$  is heating temperature of the measuring location of the heating furnace,  $T_{int}$  is initial temperature of the measuring point of the object at the measuring location,  $T_s$   
20 is achieved temperature when the object is heated at the measuring location,  $t$  is heating time at the measuring location,  $m$  is the corresponding heating characteristic value, and  $e$  is the base of natural logarithms.

19. A method according to claim 12, wherein said

required conditions for heating the object includes either one of, or any combination of:

(a) targeted heating temperature and heating time for keeping the object at a certain temperature for a certain length of time so as to achieve the purpose of heating;

(b) required upper end temperature that the object needs to achieve during heating;

(c) maximum temperature, which is the temperature the object should not go over for sustaining its function;

(d) allowable limited temperature and time that the object may endure during heating process;

(e) preheat temperature and time required for heating the object prior to heating for the ultimate purpose, and

(f) allowable temperature variation among a plurality of measuring points of the object.

20. A program for making a computer to process steps of determining appropriate heating condition of a heating furnace having a plurality of heating sections for heating an object in accordance with a required temperature profile corresponding to predetermined required conditions for heating the object, said steps comprising:

obtaining heating characteristic value of at least one measuring location of each of said plurality of heating sections calculated from heating temperature and heating time at said measuring location as well as measured



temperature of at least one measuring point of the object when the object is heated under certain heating condition at said measuring location,

5 electing one measuring point which has achieved the highest temperature during the heating among all the measuring points, and confirming whether temperature of the elected measuring point is not over the upper limit of the required conditions (confirmation step A);

10 when temperature of the elected measuring point is over the required conditions at the confirmation step A, modifying the heating condition by lowering the heating temperature based on a predetermined rule and simulating temperature at each measuring point under the modified heating condition by using the corresponding heating  
15 characteristic value, and repeating the above procedures from the confirmation step A;

when temperature of the elected measuring point is not over the required conditions at the confirmation step A, confirming whether or not the elected measuring point meets  
20 heating time of the required conditions (confirmation step B);

when the heating time of the elected measuring point falls short of the required conditions at the confirmation step B, modifying the heating condition by raising the  
25 heating temperature based on a predetermined rule or by

lengthening the heating time based on a predetermined rule and simulating temperature for each measuring point under the modified heating condition by using said corresponding heating characteristic value, and repeating the above  
5 procedures from the confirmation step A;

when the heating time of the elected measuring point goes over the required conditions at the confirmation step B, modifying the heating condition by lowering the heating temperature based on a predetermined rule or by shortening  
10 the heating time based on a predetermined rule and simulating temperature for each measuring point under the modified heating condition by using the corresponding heating characteristic value, and repeating the above procedures from the confirmation step A;

15 when the heating time of the elected measuring point meet the required conditions at the confirmation step B, confirming whether or not all the other measuring points meet the required conditions (confirmation step C);

when any one of the measuring points does not meet the  
20 required conditions at the confirmation step C, modifying the heating condition by lengthening the heating time based on a predetermined rule or by raising the heating temperature based on a predetermined rule and simulating temperature for each measuring point under the modified  
25 heating condition by using the corresponding heating

characteristic value, and repeating the above procedures from the confirmation step A;

when all the measuring points meet the required conditions at the confirmation step C, determining that such heating condition is appropriate for satisfying the required temperature profile.

21. A program for making a computer to process steps of determining appropriate heating condition of a heating furnace having a plurality of heating sections for heating an object in accordance with a required temperature profile corresponding to predetermined required conditions for heating the object, said steps comprising:

obtaining heating characteristic value of at least one measuring location of each of said plurality of heating sections calculated from heating temperature and heating time at said measuring location as well as measured temperature of at least one measuring point of the object when the object is heated under certain heating condition at said measuring location,

electing one measuring point, as a critical measuring point, which has achieved the lowest temperature during the heating among all the measuring points,

detecting heating condition of each of the heating sections which may make said critical measuring point to satisfy both of the required upper end temperature that the

object needs to achieve and the maximum temperature that the object should no go over, by simulating temperature of the critical measuring point by using the corresponding heating characteristic value for each of the measuring  
5 locations based on a predetermined algorithm,

confirming whether any of the detected heating conditions at the detecting step meet targeted heating temperature and heating time that the object needs to clear for fulfilling the purpose of heating (confirmation step  
10 D);

when none of the detected heating conditions meet the targeted heating temperature and heating time at the confirmation step D, modifying the heating condition by lengthening the heating time based on a predetermined rule  
15 and simulating temperature at each measuring point under the modified heating condition by using the corresponding heating characteristic value, and repeating the above procedures from the step of electing the critical measuring point;

20 when any of the detected heating conditions meet the targeted heating temperature and heating time at the confirmation step D, confirming whether such detected heating condition(s) meet other required conditions of allowable limited temperature and time that the object may  
25 endure during heating (confirmation step E);

when none of the detected heating condition(s) meet the allowable limited temperature and time at the confirmation step E, modifying the heating condition by shortening the heating time based on a predetermined rule and simulating temperature at each measuring point under the modified heating condition by using the corresponding heating characteristic value, and repeating the above procedures from the step of electing the critical measuring point;

10 when any one of the detected heating condition(s) meet the allowable limited temperature and time at the confirmation step E, temporarily electing one detected heating condition that has cleared the allowable limited temperature and time requirement by the shortest time among  
15 all the detected heating condition(s) as the appropriate heating condition for satisfying the required temperature profile;

confirming whether all the other measuring points meet the required conditions by simulating temperatures under  
20 the temporarily elected heating condition by using the corresponding heating characteristic values of the other measuring points (confirmation step F);

when none of the measuring points meet the required conditions at the confirmation step F, modifying the  
25 temporarily elected heating condition by shortening heating

time based on a predetermined rule and simulating temperature of each measuring point under the modified heating condition by using the corresponding heating characteristic value, and repeating the above procedures

5 from the step of electing the critical measuring point, and

when all the measuring points meet the required conditions at the confirmation step F, determining that the temporarily elected heating condition is appropriate for satisfying the required temperature profile.

10 22. A program for making a computer to process steps of determining appropriate heating condition of a heating furnace having a plurality of heating sections forming a first and a second heating stages for heating an object in accordance with a required temperature profile  
15 corresponding to predetermined required conditions for each of the first and the second stages, said steps comprising:

obtaining heating characteristic value for at least one measuring location of each of said plurality of heating sections calculated from heating temperature and heating  
20 time at said measuring location as well as measured temperature of at least one measuring point of the object when the object is heated under certain heating condition at the measuring location,

electing one measuring point which has achieved the  
25 highest temperature during heating at the first heating

stage among all the measuring points, and confirming whether temperature of the elected measuring point is not over the upper limit of the required conditions (confirmation step A);

5       when temperature of the elected measuring point is over the required conditions of the first heating stage at the confirmation step A, modifying the heating condition by lowering the heating temperature based on a predetermined rule and simulating temperature at each measuring point  
10       under the modified heating condition by using the corresponding heating characteristic value, and repeating the above procedures from the confirmation step A;

15       when temperature of the elected measuring point is not over the required conditions of the first heating stage at the confirmation step A, confirming whether or not the elected measuring point meets heating time of the required conditions of the first heating stage (confirmation step B);

20       when the heating time of the elected measuring point falls short of the required conditions of the first heating stage at the confirmation step B, modifying the heating condition by raising the heating temperature based on a predetermined rule or by lengthening the heating time based on a predetermined rule and simulating temperature for each  
25       measuring point under the modified heating condition by

using the corresponding heating characteristic value, and repeating the above procedures from the confirmation step A;

5 when the heating time of the elected measuring point goes over the required conditions of the first heating stage at the confirmation step B, modifying the heating condition of the first heating stage by lowering the heating temperature based on a predetermined rule or by shortening the heating time based on a predetermined rule  
10 and simulating temperature for each measuring point under the modified heating condition by using the corresponding heating characteristic value, and repeating the above procedures from the confirmation step A;

15 when the heating time of the elected measuring point meet the required conditions of the first heating stage at the confirmation step B, confirming whether or not all the other measuring points meet the required conditions of the first heating stage (confirmation step C);

20 when any one of the measuring points does not meet the required conditions of the first heating stage at the confirmation step C, modifying the heating condition by lengthening the heating time of the first heating stage based on a predetermined rule or by raising the heating temperature of the first heating stage based on a  
25 predetermined rule and simulating temperature for each



measuring point under the modified heating condition by using the corresponding heating characteristic value, and repeating the above procedures from the confirmation step A;

5           when all the measuring points meet the required conditions for the first heating stage at the confirmation step C, electing one measuring point, as a critical measuring point, which has achieved the lowest temperature at the second heating stage during heating among all the  
10   measuring points;

          detecting heating condition of each of the heating sections in the second heating stage which may make said critical measuring point to satisfy both of the required upper end temperature that the object needs to achieve and  
15   the maximum temperature that the object should no go over, by simulating temperature of the critical measuring point by using the corresponding heating characteristic value for each of the measuring locations in the second heating stage based on a predetermined algorithm,

20           confirming whether or not any of the detected heating conditions at the detecting step meet targeted heating temperature and heating time that the object needs to clear for fulfilling the purpose of heating (confirmation step D);

25           when none of the detected heating conditions meet the

targeted heating temperature and heating time at the confirmation step D, modifying the heating condition by lengthening the heating time based on a predetermined rule and simulating temperature at each measuring point under the modified heating condition by using the corresponding heating characteristic value, and repeating the above procedures either from the step of electing the critical measuring point or from the confirmation step A;

when any one of the detected heating conditions meet the targeted heating temperature and heating time at the confirmation step D, confirming whether such detected heating condition(s) meet other required conditions of allowable limited temperature and time that the object may endure during heating (confirmation step E);

when none of the detected heating condition(s) meet the allowable limited temperature and time at the confirmation step E, modifying the heating condition by shortening the heating time based on a predetermined rule and simulating temperature at each measuring point under the modified heating condition by using the corresponding heating characteristic value, and repeating the above procedures either from the step of electing the critical measuring point or from the confirmation step A;

when any one of the detected heating condition(s) meet the allowable limited temperature and time at the

confirmation step E, temporarily electing one detected heating condition that has cleared the allowable limited temperature and time requirement by the shortest time among all the detected heating condition(s) as the appropriate heating condition for satisfying the required temperature profile;

confirming whether all the other measuring points meet the required conditions of the second heating stage by simulating temperatures under the temporarily elected heating condition by using the corresponding heating characteristic values of the other measuring points (confirmation step F);

when any of the measuring points do not meet the required conditions of the second heating stage at the confirmation step F, modifying the temporarily elected heating condition by shortening heating time based on a predetermined rule and simulating temperature of each measuring point under the modified heating condition by using the corresponding heating characteristic value, and repeating the above procedures either from the step of electing the critical measuring point or from the confirmation step A; and

when all the measuring points meet the required conditions for the second heating stage at the confirmation step F, determining that the temporarily elected heating

condition is appropriate for satisfying the required temperature profile.

23. A program according to claim 22, wherein when none of heating conditions for the critical measuring point could meet the targeted heating temperature and time requirement at the confirmation step D during the course of the repeated procedures after it was found at the confirmation step F that none of the measuring points meet the required conditions of the second heating stage, and modification of the heating condition was made by shortening heating time, the program further includes a logic of determining approximately appropriate heating condition by lengthening the heating time of the latest temporarily elected heating condition based on a predetermined rule.

24. A program according to claim 22, wherein the program further includes a logic of making a judgment that determining appropriate heating condition for heating the object in accordance with the required temperature profile is impossible when number of repeating procedures in a closed loop at any of the confirmation steps A - F exceeds a predetermined times.

25. A program according to claim 22, wherein said heating characteristic value is an m-value defined by:

$$m = \frac{1}{t} \ln \left[ \frac{T_a - T_{int}}{T_a - T_s} \right]$$

wherein  $\ln$  is natural logarithm,  $T_a$  is heating temperature of the measuring location of the heating furnace,  $T_{int}$  is initial temperature of the measuring point of the object at the measuring location,  $T_s$  is achieved temperature when the object is heated at the measuring location, and  $t$  is heating time at the measuring location,

and simulating temperature of each of measuring point using the corresponding heating characteristic value is made based on a following basic equation for heating:

$$T_s = T_a - (T_a - T_{int}) e^{-m t}$$

wherein  $e$  in the equation represents the base of natural logarithms.

26. A program according to claim 22, wherein the predetermined rule for lowering the heating temperature when temperature of the elected measuring point is over the required conditions at the confirmation step A is either lowering the heating temperature down to the upper end temperature of the allowable range of the required heating conditions, or lowering the heating temperature by an amount obtained by multiplying a certain ratio to a temperature difference identified between the measured or simulated temperature and the upper end temperature of the allowable range.

27. A program according to claim 22, wherein the predetermined rule for raising or lowering the heating temperature when heating time of the elected measuring point falls short of or goes over the required conditions at the confirmation step B is either raising or lowering the heating temperature of the particular heating section(s) by a predetermined amount, which particular heating section(s) are those located in advance of the heating section where temperature of the elected measuring point reaches the allowable range of the required conditions.

28. A program according to claim 22, wherein the predetermined rule for lengthening heating time when any one of the measuring points does not meet the required conditions at the confirmation step C is to multiply preceding transfer speed of the object with a ratio closest to 1 among the ratios of required heating time versus measured or simulated heating time for each of the measuring points which failed to meet the required conditions, or to divide the preceding heating time by the same ratio.

29. A program according to claim 22, wherein the predetermined algorithm for detecting heating conditions for making the critical measuring point to satisfy both of the required upper end temperature and the maximum

temperature is configured by the steps of:

creating combinations of heating condition of at least two heating sections by raising respective heating temperatures independently by every predetermined amount from the initial temperature of the object at the beginning of the heating section up to a predetermined upper limit temperature defined by the heating furnace;

simulating temperature of the critical measuring point under each of the created combinations of the heating condition, and developing temperature profiles corresponding to each of the combinations of the heating condition; and

detecting any of the combinations of the heating condition which may make the corresponding simulated temperature to locate inside a zone defined by said at least two heating sections, which zone is surrounded by an upper boundary and a lower boundary, wherein the upper boundary comprising an temperature increase line between a point H of an initial temperature of the preceding heating section and a point E of the maximum temperature at the end of the same heating section as well as a line of the maximum temperature between said point E and a point G at the end of said at least two heating sections, while the lower boundary comprising a line between said point H and a point F of the required upper end temperature at the end of

said at least two heating sections.

30. A program according to claim 22, wherein the predetermined rule for lengthening the heating time when none of the heating conditions meet the required time  
5 conditions at the confirmation step D is to multiply preceding transfer speed of the object with a ratio closest to 1 among the ratios of the heating time at the targeted heating temperature versus corresponding simulated time for each of the measuring points which failed to meet the  
10 required conditions, or to divide the preceding heating time by the same ratio.

31. A program according to claim 22, wherein the predetermined rule for shortening the heating time when none of the heating conditions meet the required time  
15 conditions at the confirmation step E is to multiply preceding transfer speed of the object with a ratio closest to 1 among the ratios of heating time at the allowable limited temperature versus corresponding simulated time for each of the measuring points which failed to meet the  
20 required conditions, or to divide the preceding heating time by the same ratio.

32. A program according to claim 22, wherein the predetermined rule for shortening the heating time when any of the heating conditions do not meet the required  
25 conditions at the confirmation step F is to multiply



preceding transfer speed of the object with a ratio closest to 1 among the ratios of the heating time at the targeted heating temperature versus corresponding simulated time, or among the ratios of the heating time at the allowable limited temperature versus corresponding simulated time for each of the measuring points which failed to meet the required condition, or to divide the preceding heating time by the same ratio.

33. A program according to claim 22, wherein in addition to overall required conditions for heating the object which are to be applied equally to any part of the object, individual required conditions are separately determined which are to be applied to corresponding each of the measuring points of the object individually, and the program further includes a logic for making a judgment that even if the heating condition does not meet some requirements of the overall required conditions at some measuring points, such heating conditions are deemed appropriate as far as said individual required conditions to be applied to those particular measuring points are satisfied.

34. A computer readable recording medium recording a program for making a computer to process steps of determining appropriate heating condition for heating an object in accordance with a required temperature profile

corresponding to required conditions for heating the object, wherein said program is defined by claim 22.

35. An apparatus for performing thermal analysis to be used for heating an object in a heating furnace, comprising a input means, a memory and a processor,

wherein said input means obtains information of heating temperature and heating time of the heating furnace and temperature of the object,

said memory stores a logic for calculating heating characteristic value, and a basic equation for heating or a logic for calculating temperature of the object to be heated by using said heating characteristic value as well as the heating temperature and heating time, and

said processor calculates either said heating characteristic value or temperature of the object corresponding to the heating temperature and the heating time, by using said logics and said basic equation for heating stored in the memory.

36. An apparatus according to claim 35, wherein the apparatus further comprises a reading means for reading recording medium, wherein the processor determines appropriate heating condition including heating temperature and heating time, which may satisfy the required conditions of the object to be heated, by using the required conditions for heating the object obtained by the input

means, algorithm that the reading means obtained by reading the recording medium, and the heating characteristic value calculated by the processor.

37. An apparatus according to claim 35, wherein said  
5 heating characteristic value is an m-value defined by:

$$m = \frac{1}{t} \ln \left[ \frac{T_a - T_{int}}{T_a - T_s} \right]$$

wherein  $\ln$  is natural logarithm,  $T_a$  is the heating temperature,  $T_{int}$  is initial temperature of the object,  $T_s$  is achieved temperature when the object is heated, and  $t$  is  
10 the heating time.

38. An apparatus according to claim 35, wherein said basic equation for heating is defined by:

$$T_s = T_a - (T_a - T_{int}) e^{-m t}$$

wherein  $T_a$  is the heating temperature,  $T_{int}$  is initial  
15 temperature of the object,  $T_s$  is achieved temperature when the object is heated,  $t$  is the heating time,  $e$  is the base of natural logarithms, and  $m$  is the heating characteristic value.

39. A heat controller for determining appropriate  
20 heating condition including heating temperature and heating time for each of heating sections structured in a heating furnace, and for controlling the heating furnace based on such determined appropriate heating condition so as to heat an object in accordance with a required temperature profile

corresponding to required conditions for heating the object, said controller comprising an input means, an output means, a memory, a processor and a reading means for reading recording media,

5            wherein the controller controls the heating furnace by reading recording medium defined by claim 34.

40. A heating furnace for heating an object introduced into the furnace in accordance with a required temperature profile corresponding to required conditions  
10           for heating the object, said heating furnace comprising at least one heating section, a heat source provided to each of the heating sections for heating the object, and a heat controller capable of controlling heating condition for each of the heating sections,

15           wherein said heat controller is defined by claim 39.


41. A heating furnace according to claim 40, wherein said heating furnace is either one of reflow furnace, heat treatment furnace, sintering furnace, baking oven, melting furnace, and incinerating equipment.


20           42. A method of thermal analysis, wherein cooling characteristic of at least one measuring point of an object at one measuring location of a cooling equipment is determined as a single invariable by using temperature measured at said at least one measuring point of the object  
25           as well as cooling temperature and cooling time at the at

least one measuring location of the cooling apparatus, which cooling characteristic represents physical characteristics of both of the cooling equipment and the object to be cooled.

- 5           43. A method according to claim 42, wherein appropriate cooling condition of a cooling equipment for cooling the object in accordance with a required temperature profile is determined by using the determined invariables.

Fig. 1

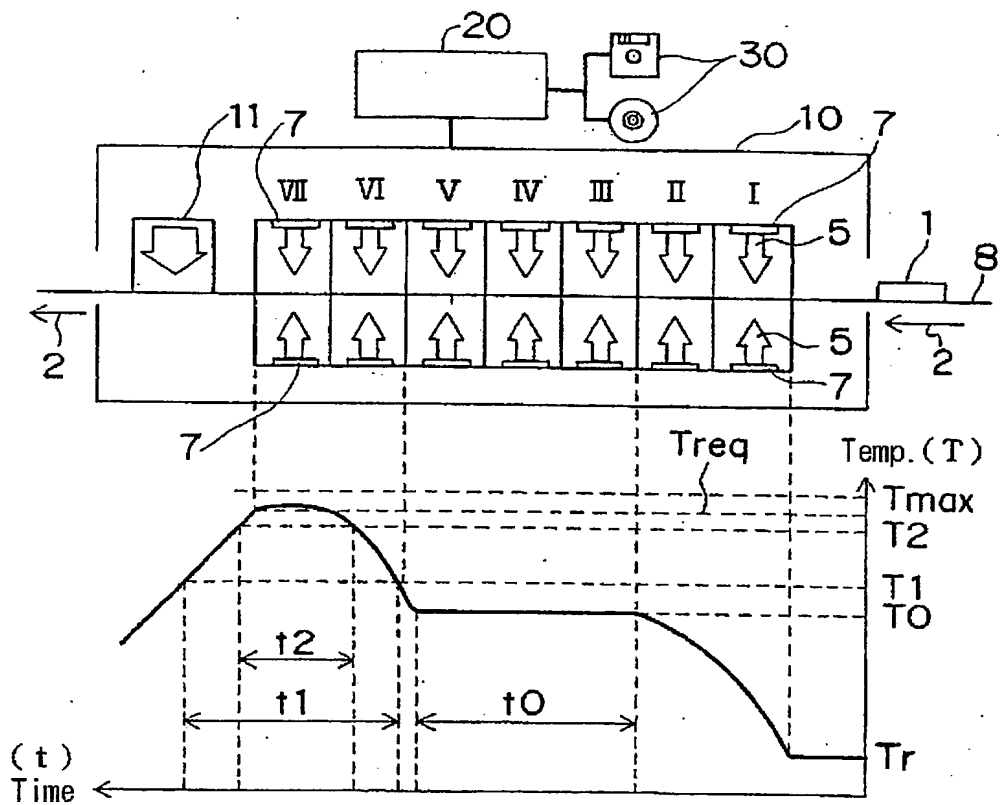

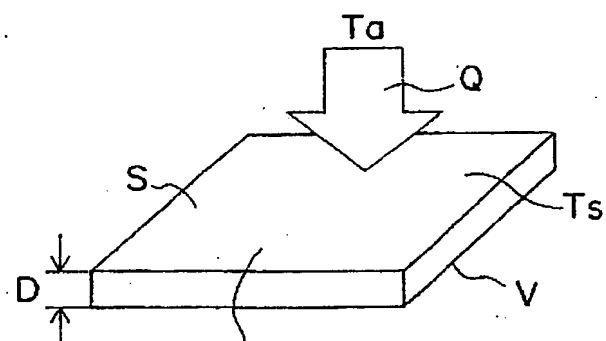*Fig. 2*

measuring point:

physical characteristics

 $\rho$  : density  
 $C$  : specific heat  
 $h$  : rate of heat transfer


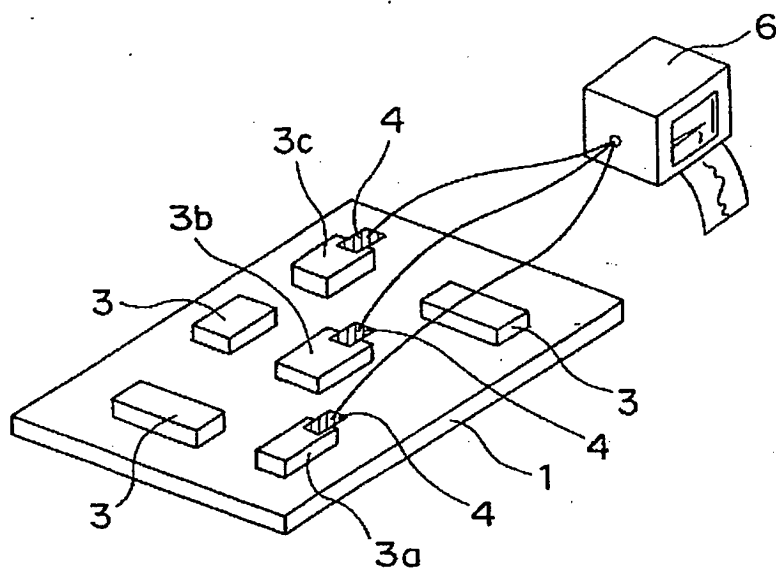
*Fig. 3*



Fig. 4

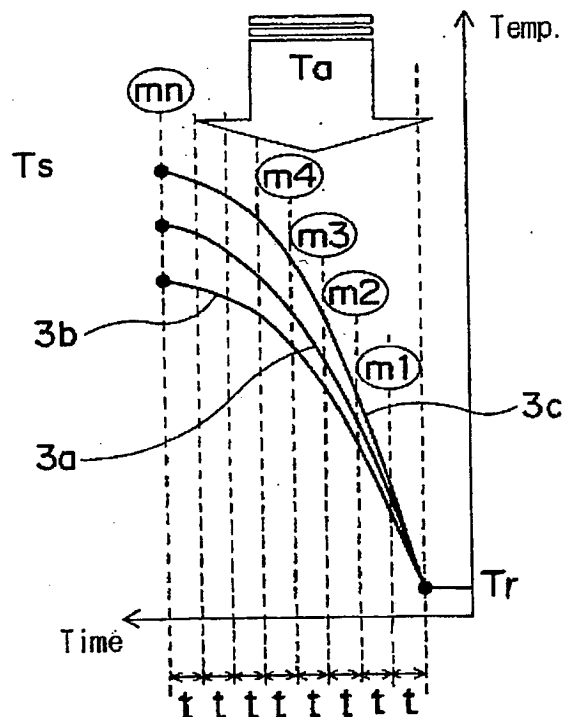

5/17

**Fig.5**

(a)

Heating Sections	Reflow Stage		Preheat Stage				
	VII	VI	V	IV	III	II	I
Heating Temp.	240	240	190	190	190	190	190

V=1.25m/minute

(b)

Heating Sections	Reflow Stage		Preheat Stage				
	VII	VI	V	IV	III	II	I
Heating Temp.	240	277	190	190	190	259	259

V=1.25m/minute

(c)

Items	Simulation		
	3a	3b	3c
$\Delta T$ [°C]	4.8		
Peak Temp. [°C]	232.0	228.1	232.9
Time[sec] over 220°C	25.6	22.4	25.2
Time[sec] over 200°C	38.2	35.0	38.2

(d)

Items	Verification		
	3a	3b	3c
$\Delta T$ [°C]	6.3		
Peak Temp. [°C]	231.7	225.7	232.0
Time[sec] over 220°C	28.0	20.8	25.0
Time[sec] over 200°C	39.4	34.8	38.0

(e)

Items	Simulation - Verification		
	3a	3b	3c
$\Delta T$ [°C]	-1.5		
Peak Temp. [°C]	0.3	2.4	0.9
Time[sec] over 220°C	-2.4	1.6	0.2
Time[sec] over 200°C	-1.2	0.2	0.2

6/17

**Fig.6**

(a)

Heating Sections	Reflow Stage		Preheat Stage				
	VII	VI	V	IV	III	II	I
Heating Temp.	240	240	190	190	190	190	190

V=0.8m/minute

(b)

Heating Sections	Reflow Stage		Preheat Stage				
	VII	VI	V	IV	III	II	I
Heating Temp.	240	240	190	190	190	190	190

V=1.6m/minute

(c)

Items	Simulation		
	3a	3b	3c
$\Delta T$ [°C]	10.7		
Peak Temp. [°C]	213.3	202.6	210.8
Time[sec] over 200°C	20.6	5.7	15.2
Time[sec] over 180°C	37.6	26.9	33.3


(d)

Items	Verification		
	3a	3b	3c
$\Delta T$ [°C]	8.4		
Peak Temp. [°C]	212.9	206.5	214.9
Time[sec] over 200°C	18.4	10.0	19.8
Time[sec] over 180°C	36.4	27.8	34.2


(e)

Items	Simulation - Verification		
	3a	3b	3c
$\Delta T$ [°C]	2.3		
Peak Temp. [°C]	0.4	-3.9	-4.1
Time[sec] over 200°C	2.2	-4.3	-4.6
Time[sec] over 180°C	1.2	-0.9	-0.9

7/17

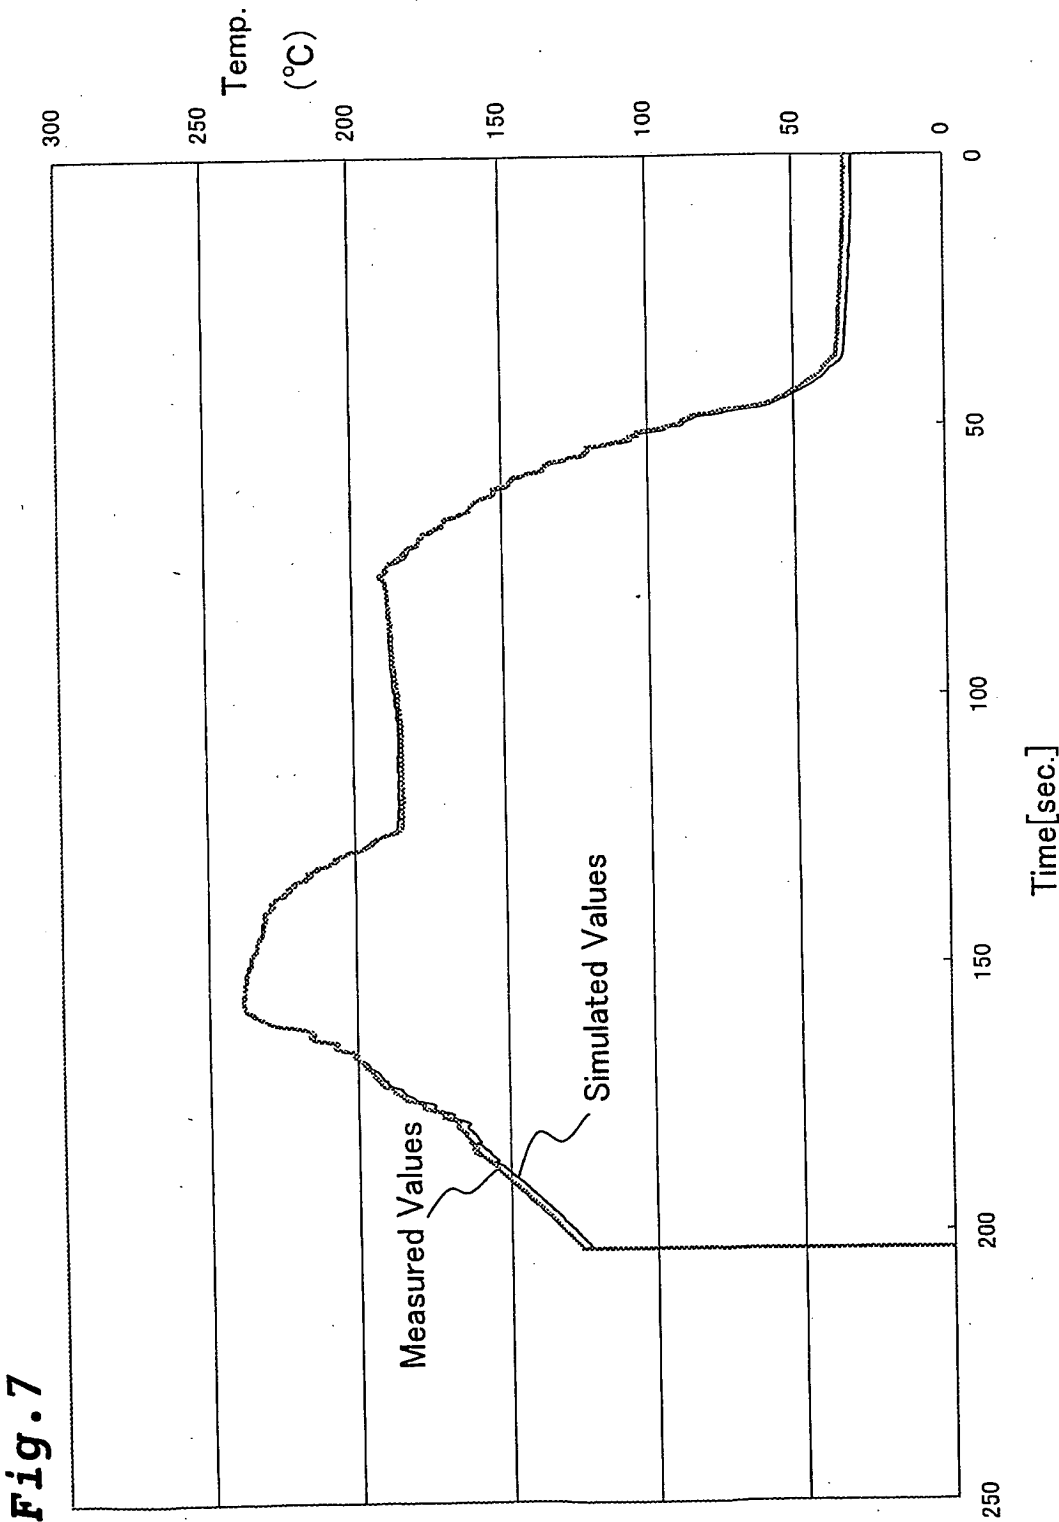

8/17

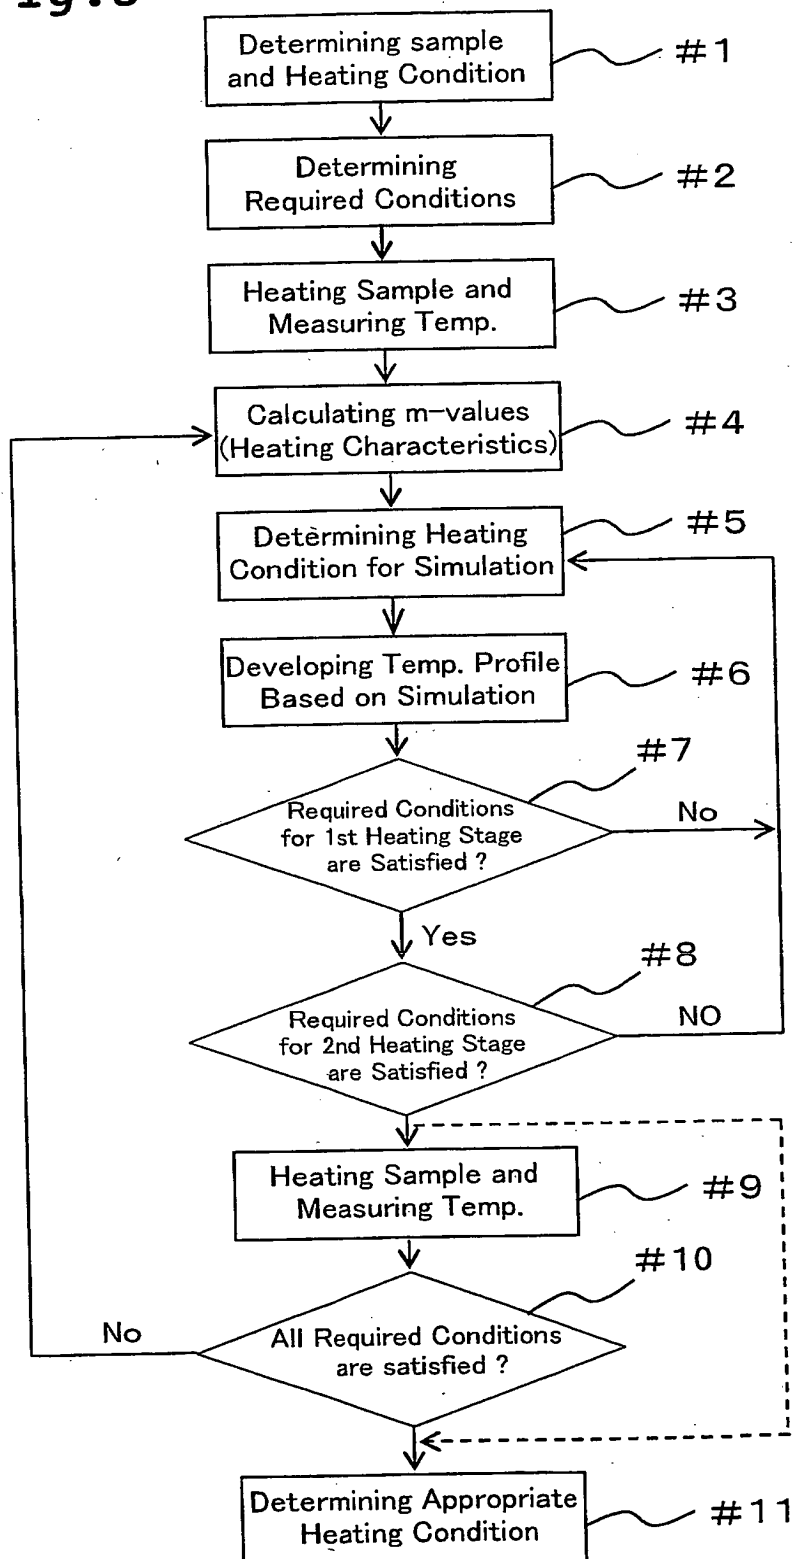**Fig. 8**

9/17

Fig. 9

(a)

Heating Sections	VII	VI	V	IV	III	II	I
Heating Temp.	240	240	190	190	190	190	190

(b)

Heating Sections	VII	VI	V	IV	III	II	I
Heating Temp.	256	281	190	190	190	273	273

(f)

Heating Sections	VII	VI	V	IV	III	II	I
Heating Temp.	254	292	180	180	180	263	263

V=1.35m/minute

(c)

Items	Simulation		
	3a	3b	3c
$\Delta T$ [°C]	5.8		
Peak Temp. [°C]	236.0	231.0	236.8
Time[sec] over 220°C	25.7	22.0	25.6
Time[sec] over 200°C	39.0	34.7	37.9

(d)

Items	Verification		
	3a	3b	3c
$\Delta T$ [°C]	7.2		
Peak Temp. [°C]	239.4	232.9	240.1
Time[sec] over 220°C	29.0	24.4	27.8
Time[sec] over 200°C	41.4	35.8	37.0

(e)

Items	Simulation - Verification		
	3a	3b	3c
$\Delta T$ [°C]	-1.4		
Peak Temp. [°C]	-3.4	-1.9	-3.3
Time[sec] over 220°C	-3.3	-2.4	-2.2
Time[sec] over 200°C	-2.4	-1.1	0.9

(g)

Items	Simulation		
	3a	3b	3c
$\Delta T$ [°C]	8.5		
Peak Temp. [°C]	238.3	230.3	238.8
Time[sec] over 220°C	27.0	21.2	24.8
Time[sec] over 200°C	37.8	32.6	35.0

(h)

Items	Verification		
	3a	3b	3c
$\Delta T$ [°C]	7.9		
Peak Temp. [°C]	238.3	231.3	239.2
Time[sec] over 220°C	27.0	22.0	25.0
Time[sec] over 200°C	38.8	32.8	35.4

(i)

Items	Simulation - Verification		
	3a	3b	3c
$\Delta T$ [°C]	0.6		
Peak Temp. [°C]	0.0	-1.0	-0.4
Time[sec] over 220°C	0.0	-0.8	-0.2
Time[sec] over 200°C	-1.0	-0.2	-0.4

10/17


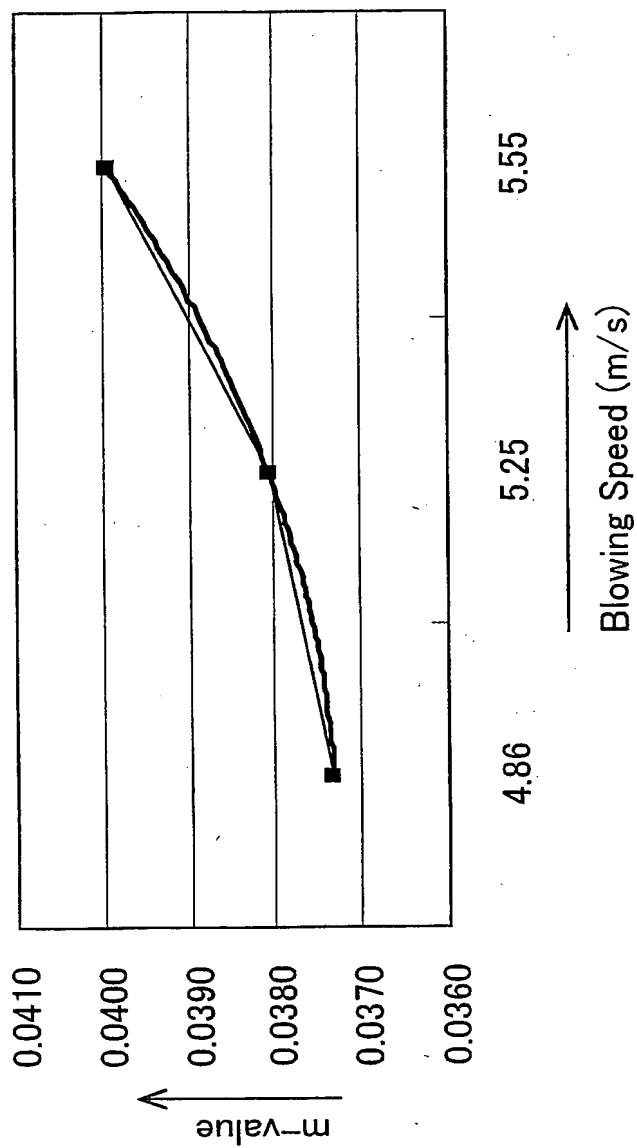
**Fig.10**

Fig. 11



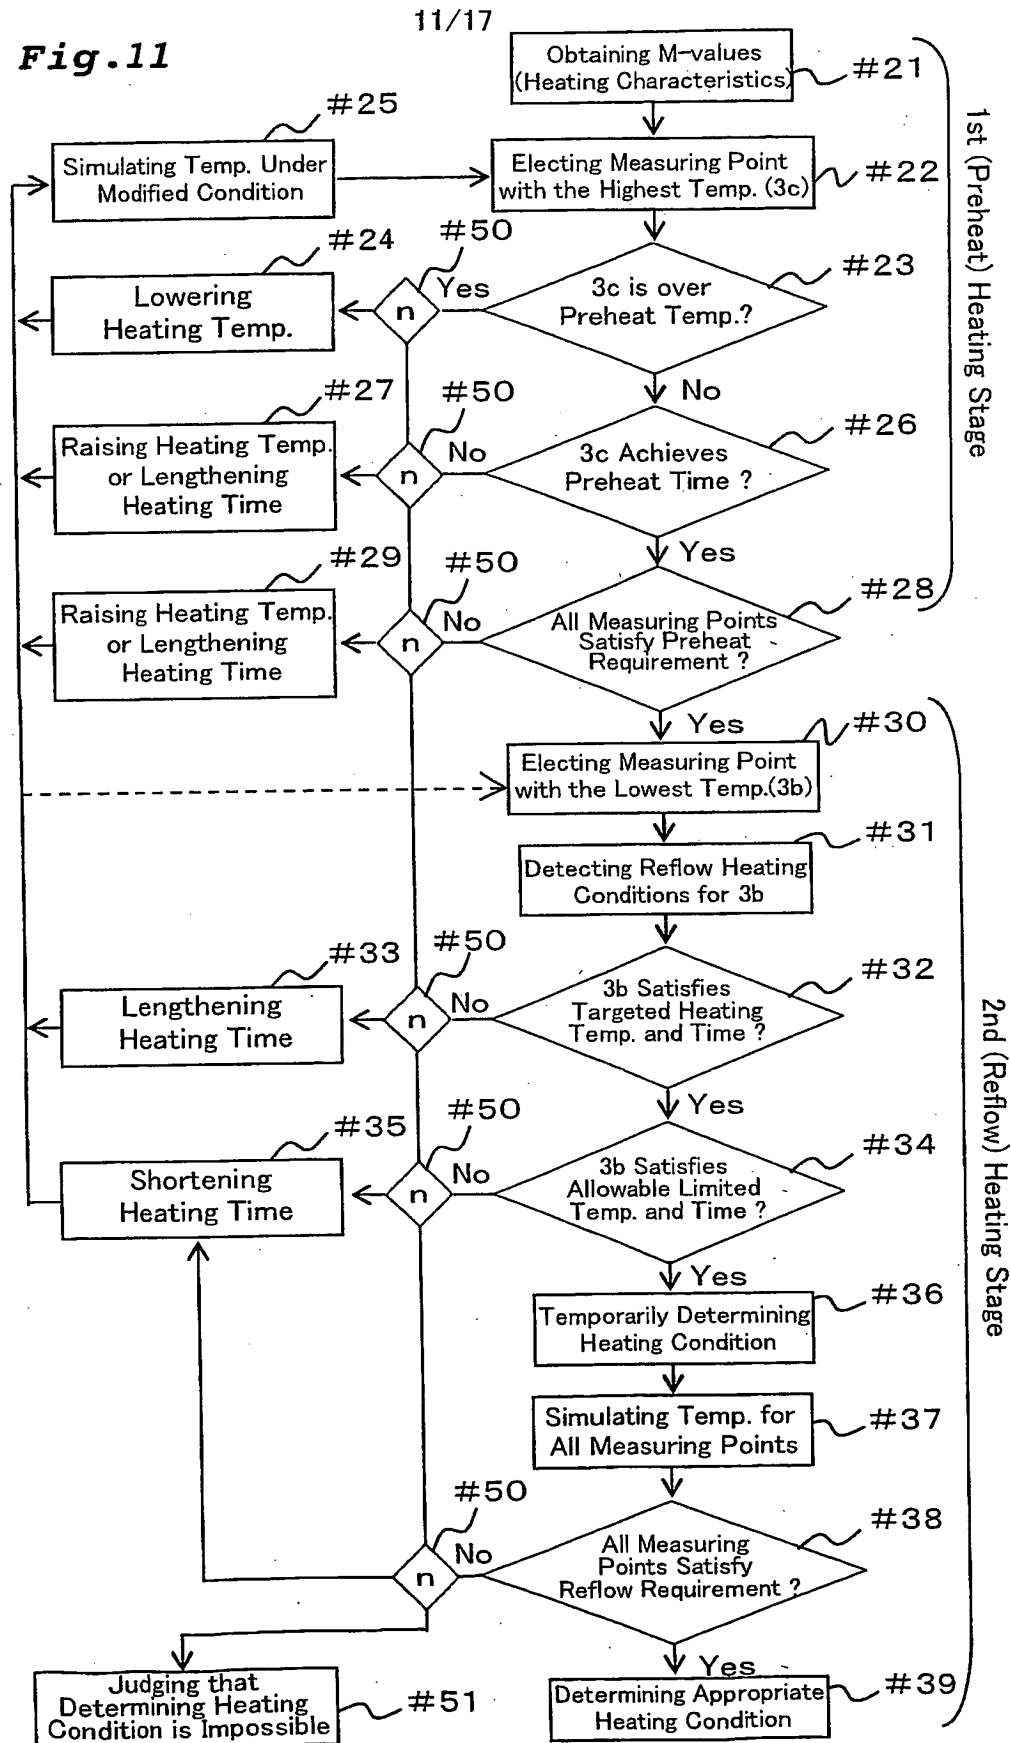

12/17

Fig. 12

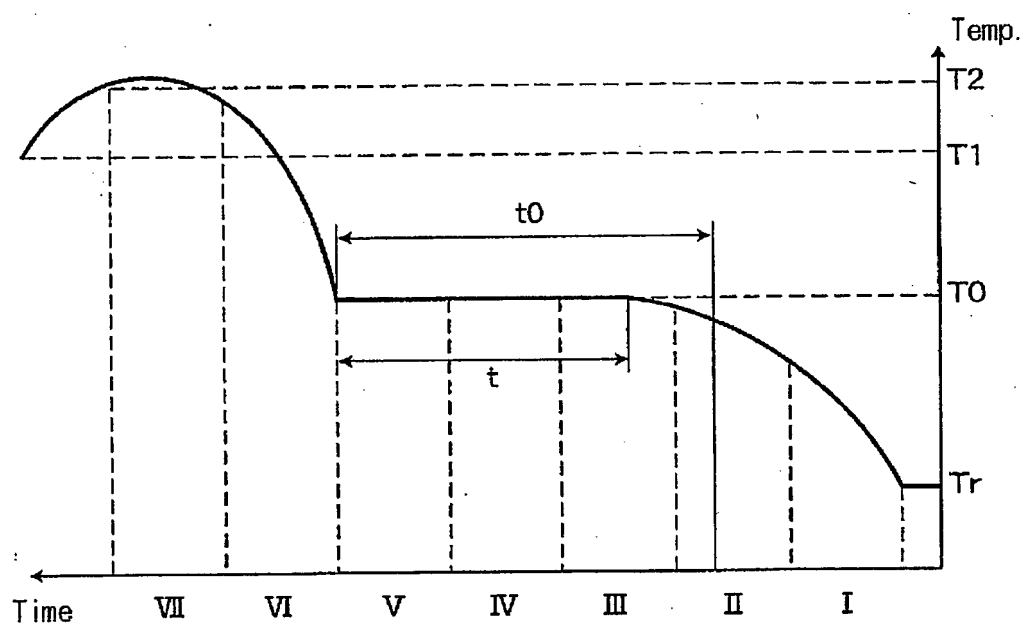


Fig. 13




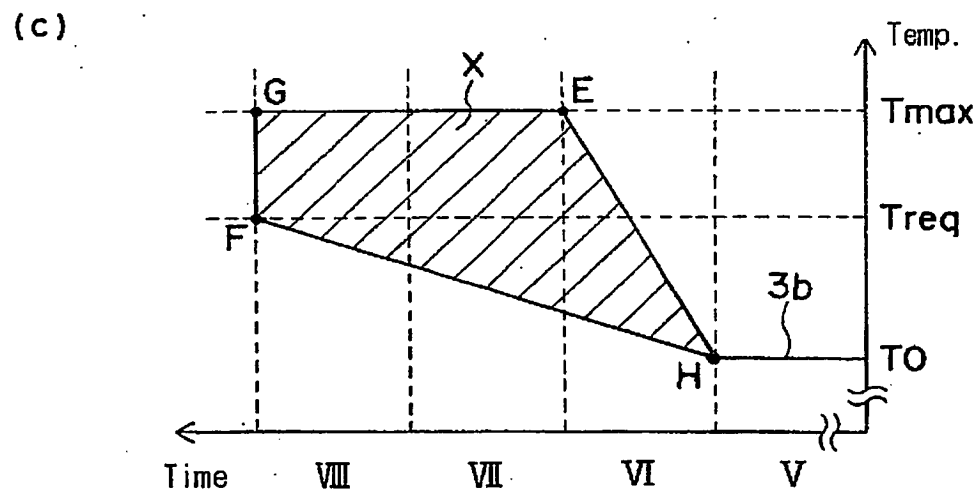


Fig. 14

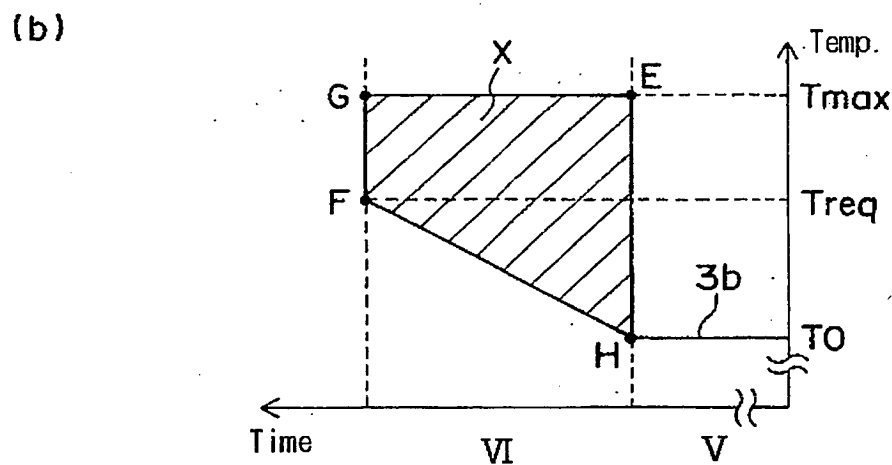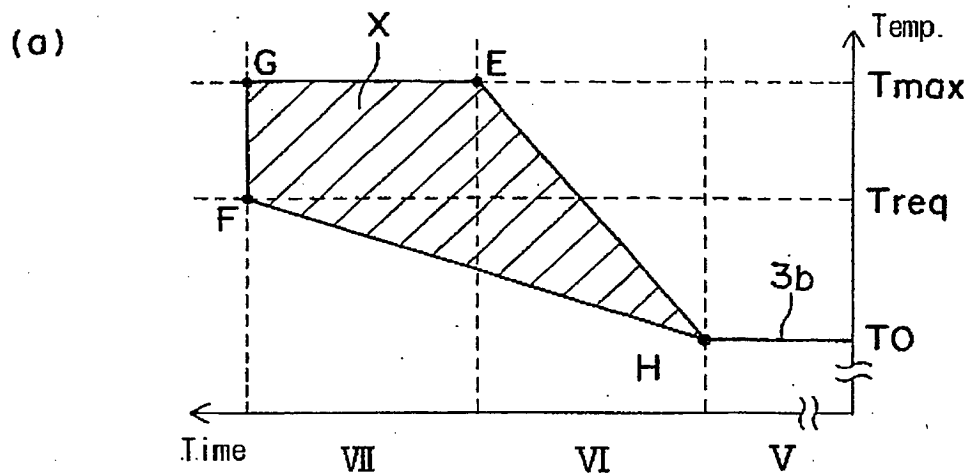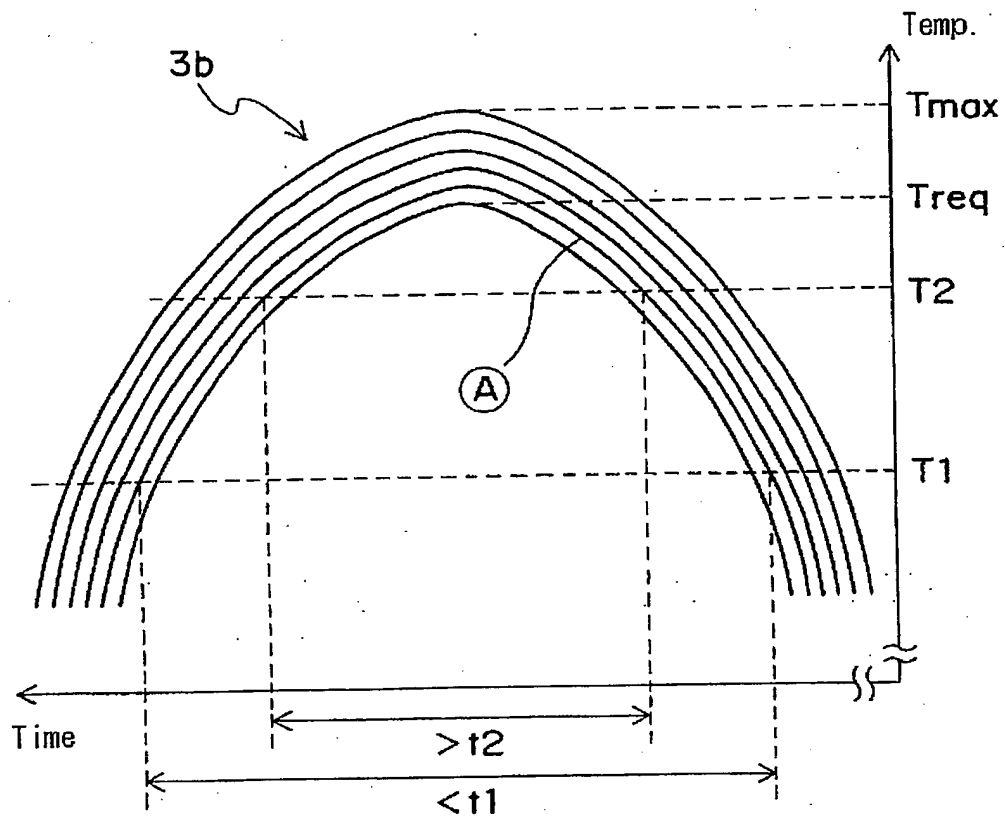

15/17

**Fig.15**

(a) Unit:Second

Items	3a	3b	3c
Time(t2) over Targeted Heating Temp.(T2)	22	21	25
Time(t1) over Allowable Limited Temp.(T1)	40	39	42

(b) Unit:Second


Items	3a	3b	3c
Time(t2) over Targeted Heating Temp.(T2)	20	18	22
Time(t1) over Allowable Limited Temp.(T1)	38	37	40

(c) Unit:Second

Items	3a	3b	3c
Time(t2) over Targeted Heating Temp.(T2)	21	20	23
Time(t1) over Allowable Limited Temp.(T1)	39	38	41


16/17

Fig.16

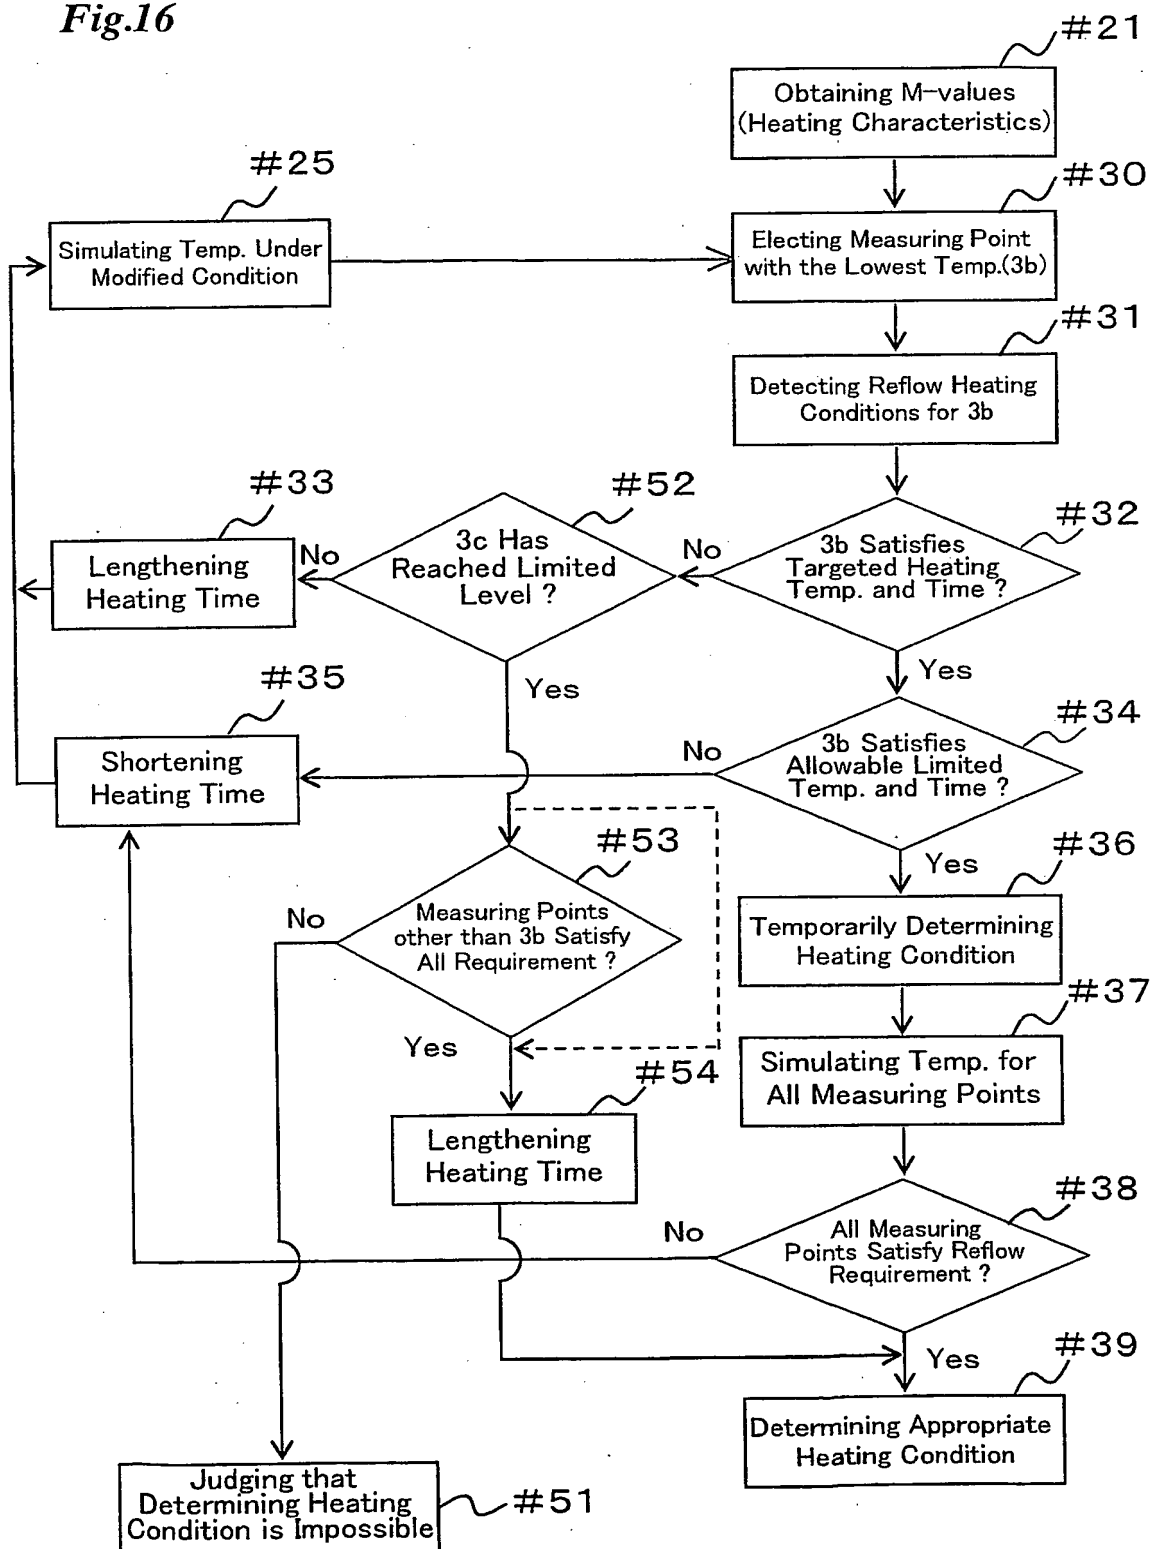

17/17

Fig.17

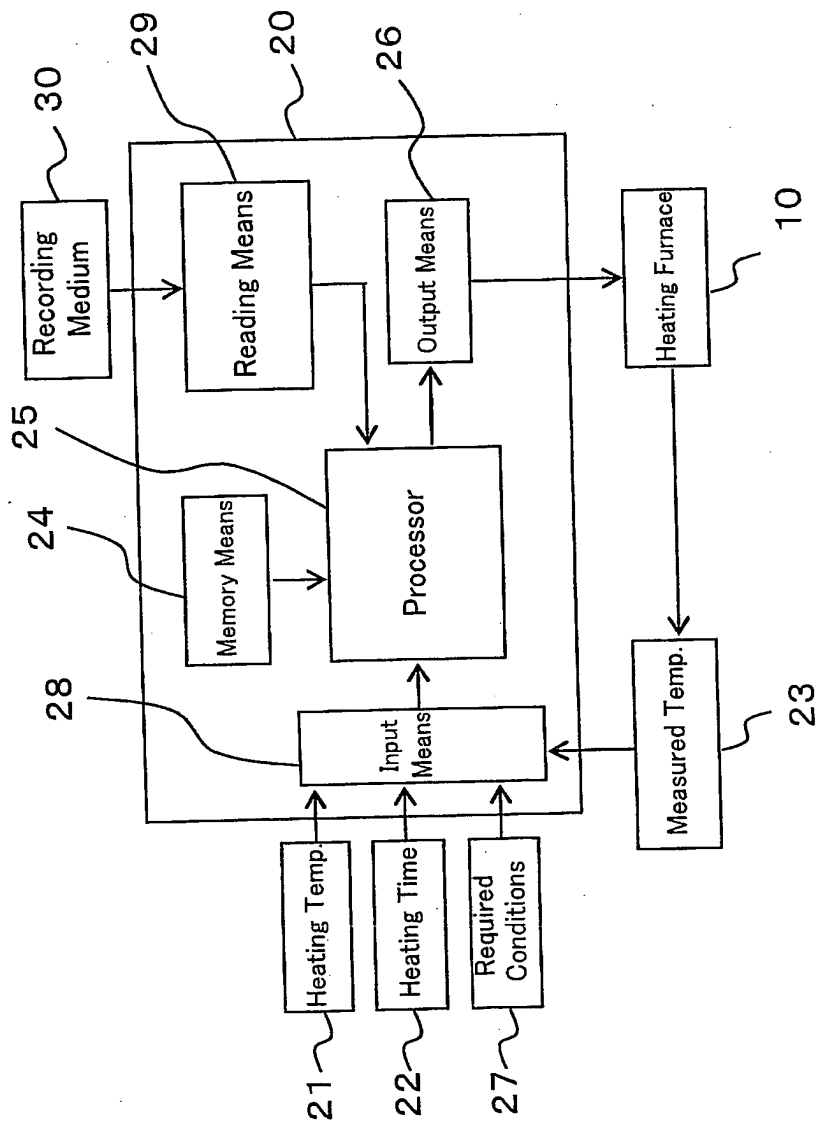

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/JP 03/09648

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4927068	A	22-05-1990	JP 1170577 A	05-07-1989
			JP 1949574 C	10-07-1995
			JP 6077830 B	05-10-1994
			KR 9105979 B1	09-08-1991
US 6283379	B1	04-09-2001	NONE	
US 6206265	B1	27-03-2001	JP 3348639 B2	20-11-2002
			JP 11123539 A	11-05-1999
			US 6619531 B1	16-09-2003
US 4775776	A	04-10-1988	US 4632291 A	30-12-1986
			CA 1267926 A1	17-04-1990
			DE 3752133 D1	27-11-1997
			DE 3752133 T2	26-03-1998
			EP 0279011 A1	24-08-1988
			JP 63026259 A	03-02-1988
			CA 1217571 A1	03-02-1987
			CA 1228174 A2	13-10-1987
			DE 3482434 D1	12-07-1990
			EP 0118091 A1	12-09-1984
			EP 0269822 A1	08-06-1988
			JP 4020700 B	06-04-1992
			JP 59193759 A	02-11-1984
			US 4666077 A	19-05-1987
US 5099442	A	24-03-1992	JP 2053692 C	23-05-1996
			JP 3148714 A	25-06-1991
			JP 7086783 B	20-09-1995
			DE 4035099 A1	03-12-1992
			GB 2238887 A , B	12-06-1991

## INTERNATIONAL SEARCH REPORT

International Application No.

03/09648

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 G05D23/19

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 G05D H05K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)  
EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 927 068 A (NAKA HIROYUKI ET AL) 22 May 1990 (1990-05-22) column 3, line 10 - column 8, line 23 claims 1,2 figures 1-3	1,8,42
A	US 6 283 379 B1 (KAZMIEROWICZ PHILIP C ET AL) 4 September 2001 (2001-09-04) abstract figures 1A-4 column 2, line 51 - column 9, line 45	1,42
X	US 6 206 265 B1 (YAMAOKA NOBUYOSHI) 27 March 2001 (2001-03-27) column 4, line 15 - column 7, line 65 claim 1 figures 3-10	12-16, 20,21

-/-



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents; such combination being obvious to a person skilled in the art.

\*G\* document member of the same patent family

Date of the actual completion of the international search

22 June 2004

Date of mailing of the international search report

02.08.2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Helot, H



# INTERNATIONAL SEARCH REPORT

International Application No.  
JP 03/09648

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 775 776 A (DROUIN MARCEL ET AL) 4 October 1988 (1988-10-04) column 2, line 16 - column 10, line 28; figures 1,2,8,12,13 -----	12-16, 20,21
X	US 5 099 442 A (ASHAHI IWAO ET AL) 24 March 1992 (1992-03-24) column 1, line 25 - column 2, line 10 column 2, line 13 - column 19, line 25 figures 1-24 -----	12-16, 20,21
X	MORALES S ET AL: "A pole-placement partial state reference model adaptive control of a rapid thermal processor" PROCEEDINGS OF THE INTERNATIONAL CONFERENCE ON SYSTEMS, MAN AND CYBERNETICS. LE TOUQUET, OCT. 17 - 20, 1993, NEW YORK, IEEE, US, vol. VOL. 3, 17 October 1993 (1993-10-17), pages 19-24, XP010132092 ISBN: 0-7803-0911-1 the whole document -----	12-16, 20,21

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/JP 03/09648

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
  
2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
  
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this International application, as follows:

see additional sheet

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
  
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
  
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
  
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-11,35-38,42,43

Method and apparatus for thermal analysis wherein a heating or cooling characteristic of an object is determined  
---

2. claims: 12-34,39-41

Method and apparatus for heating an object with a required temperature profile  
---